



Hi AIRLESS SPRAYER



No. 2 Plant, Mawei Sci-Tech Innovation Center, No. 56 Kuaizhou Road
Liando U Valley, Mawei Town, Mawei District, Fuzhou, Fujian, China
0086-591-88067287 hb@airless-sprayer.com

400-591-87913317



FUZHOU HVBAN MECHANICAL EQUIPMENTS CO. LTD.
AIRLESS SPRAYER MADE IN CHINA



2026
CATALOGUE

PRODUCTS

Say hi to professional result

HvbanSprayer.com



HVBAN® is a professional fluid equipment manufacturer, integrating development and production. We specialize in manufacturing all types of airless paint sprayers & related products over 20 years of experience. With company development and market demand, we had issued the second brand HiSprayer® in 2017.

PRODUCTION
EXPERIENCE
YEARS

20+

PRODUCTION
CAPACITY
PCS/MON.

1000

PRODUCE
WORKSHOP
M²

10000

MARKET
SHARE
COUNTRIES


140+



PROFESSIONAL



AIRLESS SPRAYER

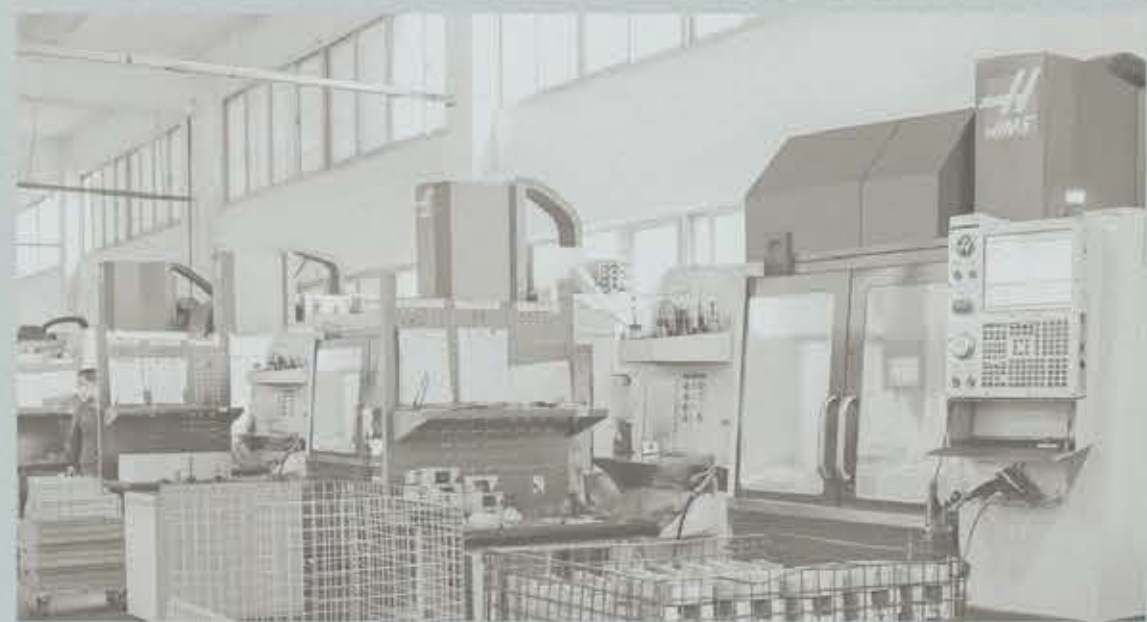

ABOUT US



CERTIFICATE

More than **70** effective patents for inventions and utility models at home & abroad.

The conversion rate of scientific and technological achievements is more than **90%**.

ACHIEVEMENT





Quality is paramount .

UNCOMPROMISED QUALITY ASSURANCE

FULL INSPECTIONS:

Each machine undergoes rigorous inspection before leaving our factory, ensuring precision and reliability.

Meticulously select premium materials, including renowned components like Germany's INA bearings, Japan's IKO bearings, USA leather packings, robust stainless steel, reflecting our commitment to delivering products of unparalleled quality & durability.

Always at the forefront of technological .

INNOVATIVE SELF-SUFFICIENCY

SELF RELIANCE:

HiSprayer boasts significant autonomy, producing the majority of components through our independent research and development efforts.

This self-reliance not only ensures the uniqueness of our products but also places us at the forefront of technological advancements in fluid equipment manufacturing.

WHY CHOOSE HiSprayer



Product Design & Development



Parts Processing & Inspection



Products Assembly & Testing



Delivery & After-Sales Service



WHY HISPRAYER





Sustainable market environment is fundamental .

CONTROLLED PRICING PRINCIPLES

LIMITED DISTRIBUTORSHIPS:

We restrict the number of distributors in each area to prevent excessive market competition and discourage predatory pricing practices.

This approach safeguards the integrity of our pricing structure and fosters a healthy and sustainable market environment.

Your reliable worldwide partner .

TWO DECADES OF GLOBAL EXPERTIES

MARKET SITUATION:

HiSprayer * Airless Sprayers have reached over 140 countries, a testament to our unwavering commitment to quality and customer satisfaction.

Our extensive experience positions us as a reliable partner for worldwide businesses.

WHY CHOOSE



HiSprayer



RUSSIA
INDONESIA
CHINA
KAZAKHSTAN

WHY HISPRAYER





High quality & Stable profitability



INTERNATIONAL BRANDS

Adhering to the highest quality standards, HiSprayer® distinguishes itself by emphasizing high profitability. Implementing controlled pricing measures in each region, we limit the number of distributors to prevent malicious price competition within the area.

This ensures market stability and prevents disruptions caused by chaotic pricing.

Proudly "Made in China", but more than just "Made in China"



CHINESE MANUFACTURERS

We distinguish ourselves from other chinese manufacturers by consistently delivering products that not only meet but exceed industry benchmarks.

Choosing HiSprayer® means choosing quality that competes on a global scale – we are more than just "Made in China."

CHOOSING THE RIGHT TOOL

WHY CHOOSE  **HiSprayer**





SAY

HI TO PROFESSIONAL RESULT



SAY HI TO PROFESSIONAL RESULT



CONTENTS

SPRAYERS

P 01 - P 72

AIRLESS SPRAYER

P 03 - P 42 ELECTRIC AIRLESS

P 43 - P 50 GASOLINE AIRLESS

P 51 - P 54 HYDRAULIC AIRLESS

P 55 - P 70 PNEUMATIC AIRLESS

P 73 - P 80

SPRAY FOAM MACHINE

P 81 - P 114

LINE STRIPER

P 115 - P 124

SPRAY GUN

P 125 - P 128

ACCESSORIES





AIRLESS SPRAYER



01

AIRLESS SPRAYER

CONTENTS :

P 03 - P 42 **ELECTRIC AIRLESS**

P 43 - P 50 **GASOLINE AIRLESS**

P 51 - P 54 **HYDRAULIC AIRLESS**

P 55 - P 70 **PNEUMATIC AIRLESS**



MODELS :

S1 / S2 / S3

HS 495 / HS 695 / HS 795

HS 1095 / HS 1195HD / HS 1395HD / HS1595HD

HS 2495 / HS 6495

HS 3135

GS 2700

GS 6300 / GS 6300 TX

GS 8300 / GS 8300 TX

HS 310-30

HS 330 Series

HS 370 Series

HS 970 / 5311

HS 960 / 5303

02





ELECTRIC AIRLESS | S1 S2 S3

S
SERIES

03



AIRLESS SPRAYER

HiSprayer® S Series Electric Airless Sprayer is one of the best tools to help to paint your job faster. Besides less time spent on the job, you are also assured of a smooth and mirror-like finish on your painting surface because the paint sprayer atomizes the paint to achieve such a finish. Portable Airless sprayer pumps can be used for a wide range of coating materials, including interior and exterior jobs, and can easily be transported from job site to job site.

S MALL & SMART

DIY OR PRO
PAINTING

PAINTING



**BRUSHLESS
DC MOTOR**



**SUPERIOR
FILTER**



**SMART
CONTROL**



**OPTIMIZED
PUMP**

ELECTRIC AIRLESS SPRAYER | S1 S2 S3



04

ELECTRIC AIRLESS

S MALL & SMART SERIES

S1 S2 S3



OPTIONAL
TRADITIONAL MECHANICAL PRESSURE GAUGE



POWERFUL MOTOR



SMART CONTROL



S1

S2



S3

UPGRADED
HOT SALE

| MODEL TYPE | S1 | S2 | S3 |
|------------------|-------------------------------|-------------------------------|--------------------------------|
| SPRAYER TYPE | DIY / PRO | PROFESSIONAL | PROFESSIONAL |
| POWER TYPE | BRUSH MOTOR | BRUSH MOTOR | BRUSHLESS DC MOTOR |
| DYNAMIC POWER | 750W 1.0HP 110V/220V, 50-60HZ | 900W 1.2HP 110V/220V, 50-60HZ | 1300W 1.7HP 110V/220V, 50-60HZ |
| FLOW DELIVERY | 1.9 LPM | 2.1 LPM | 2.3 LPM |
| WORKING PRESSURE | 20 MPA 2900PSI | 20 MPA 2900PSI | 23 MPA 3336PSI |
| MAX. NOZZLE SIZE | 0.021" T | 0.021" T | 0.023" T |
| OPTIONAL | HOPPER / HI-CART | HOPPER / HI-CART | HOPPER / HI-CART |

ELECTRIC AIRLESS SPRAYER

TECH-SPECIFICATIONS

ELECTRIC AIRLESS

S MALL & SMART SERIES

S1 S2 S3



OUTSTANDING POWER SYSTEM



OPTIMIZED PUMP ASSEMBLY

- Long life strictly selected American packings and chrome rod.
- V Packings are crafted from premium American-imported leather, offering superior durability and performance. Unlike commonly used Chinese packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high pressure.
- Achieve quicker cleaning with the intake valve.
- Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer.
- The inlet and outlet valves of the pump body are made of tungsten steel hard alloy, ensuring the machine's solidity and durability.

LONG-LIFE BRUSHLES DC MOTOR

- Improved control and performance.
- maintenance free and longer life span.

— MODEL S3 ONLY



ADVANTAGE DRIVE

- The longest-lasting drive.
- Imported Japanese IKO bearings ensure smooth and reliable transmission even under high-intensity conditions, resulting in fewer equipment failures. This enhances the reliability and durability of your operations.
- Using premium lubricating grease with excellent antioxidation and thermal stability protects critical gear components, preventing premature wear and effectively extending equipment lifespan.



HANDLE YOUR WORK MORE EFFECTIVELY



AVIATION ALUMINUM MANIFOLD

- Easy maintenance & less clogging.
- The inside-out filtering process guarantees a high-quality finish.
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency.

SMART CONTROL

- Equipped with a digital smart pressure control system as standard, allowing for real-time monitoring of equipment operating pressure. It offers swift and precise pressure adjustment response to adapt quickly to changes in spraying conditions.
- Continuous upgradability is supported, meeting the personalized customization needs of customers.

— MODEL S3 ONLY



AUTOMATIC PROTECTION SYSTEM

- In case of abnormal working pressure (typically when the pressure exceeds safe levels), the machine automatically depressurizes to ensure user safety.



LONG-LASTING HOSE ACCESSORIES

- Both the drain hose and the suction tube are made of triple-layer material, offering corrosion resistance and acid-alkali resistance. They are more durable compared to PVC tubes of similar products.

ROBUST STAINLESS STEEL FRAME

- Durable in harsh conditions with thickened, hardened stainless steel.



IDEAL FOR ANY SIZE OF
PROJECTS



FINE FINISH



**BRUSHLESS
DC MOTOR**



**SUPERIOR
FILTER**



**SMART
CONTROL**



**OPTIMIZED
PUMP**



FINE FINISH
PRO PROJECT

with high-performing, reliable, and long-duty life features that ensure a smooth and efficient painting experience.

HiSprayer® Fine FINISH Series include a diverse range of professional Electrical Airless Paint Sprayers suitable for both small and medium coating projects. Our products range from Portable Series to Project Pro Series. Each equipped



ELECTRIC AIRLESS



FINE FINISH

HS 495 HS 695 HS 795



HS 495



HS 695



HS 795

| MODEL TYPE | HS 495 | HS 695 | HS 795 |
|------------------|--------------------------------|--------------------------------|--------------------------------|
| SPRAYER TYPE | PROFESSIONAL | PROFESSIONAL | PROFESSIONAL |
| POWER TYPE | BRUSHLESS DC MOTOR | BRUSHLESS DC MOTOR | BRUSHLESS DC MOTOR |
| DYNAMIC POWER | 1300W 1.7HP 110V/220V, 50-60HZ | 1500W 2.0HP 110V/220V, 50-60HZ | 2200W 2.9HP 110V/220V, 50-60HZ |
| FLOW DELIVERY | 2.3 LPM | 2.7 LPM | 3.1 LPM |
| WORKING PRESSURE | 23 MPA 3336PSI | 23 MPA 3336PSI | 23 MPA 3336PSI |
| MAX. NOZZLE SIZE | 0.021" T | 0.025" T | 0.029" T |
| OPTIONAL | HOPPER / HI-CART | HOPPER / HI-CART | HOPPER / HI-CART |



ELECTRIC AIRLESS



FINE FINISH

HS 495 HS 695 HS 795



LONG-LIFE BRUSHLESS DC MOTOR

- Improved control and performance
- maintenance free and longer life span



ADVANTAGE DRIVE

- The longest-lasting drive
- Reliable performance and a lifetime of use are ensured by five-level grinding gears with reinforced steel
- Imported Japanese IKO bearings and German INA bearings ensure smooth and reliable transmission even under high-intensity conditions, resulting in fewer equipment failures. This enhances the reliability and durability of your operations.



Using premium lubricating grease with excellent antioxidation and thermal stability protects critical gear components, preventing premature wear and effectively extending equipment lifespan.



OPTIMIZED PUMP ASSEMBLY

- Long life strictly selected American packings and chrome rod
- V-Packings are crafted from premium American-imported leather, offering superior durability and performance. Unlike commonly used Chinese packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high pressure
- Achieve quicker cleaning with the intake valve
- Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer.
- The inlet and outlet valves of the pump body are made of tungsten steel hard alloy, ensuring the machine's solidity and durability.



AVIATION ALUMINUM MANIFOLD

- Easy maintenance & less clogging
- The inside-out filtering process guarantees a high-quality finish
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands.
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency.

SMART CONTROL

- Equipped with a digital smart pressure control system as standard, allowing for real-time monitoring of equipment operating pressure. It offers swift and precise pressure adjustment response to adapt quickly to changes in spraying conditions.
- Continuous upgradability is supported, meeting the personalized customization needs of customers.



AUTOMATIC PROTECTION SYSTEM



- In case of abnormal working pressure (typically when the pressure exceeds safe levels), the machine automatically depressurizes to ensure user safety.

ACHIEVE A FINE FINISH

UPDATED STRUCTURE OF THE DRIVE HOUSING

Optimized drive housing structure design. Provide diverse experiences of the operation.

ROBUST STAINLESS STEEL FRAME

Durable in harsh conditions, with thickened, hardened stainless steel (diameter: 32mm, thickness: 2mm). Enhanced stability ensured by a four-legged stand.

LONG-LASTING HOSE ACCESSORIES

Both the drain hose and the suction tube are made of triple-layer material, offering corrosion resistance and acid-alkali resistance. They are more durable compared to PVC tubes of similar products.



OPTIONAL | S1 S2 S3 S3 s HS 495 HS 695 HS 795

AIRLESS SPRAYER

OPTIONAL | Hi-CART & HOPPER



MORE PORTABLE
HIGH EFFICIENCY

OPTIONAL
Hi-CART



Suitable Models

| | | | |
|--------------------|-------|-------|-------|
| S SERIES | S1 | S2 | S3 |
| FINE FINISH SERIES | HS495 | HS695 | HS795 |

IMPROVE YOUR DIY OR PRO PROJECT



OPTIONAL
HOPPER



Suitable Models

| | | | | |
|--------------------|--------------|-----------------|-------|------|
| Color: Black | Material: PE | Capacity: 5.2 L | | |
| S SERIES | S1 | S2 | S3 | S3 s |
| FINE FINISH SERIES | HS495 | HS695 | HS795 | |






OPTIONAL | S1 S2 S3 S3 s HS 495 HS 695 HS 795

AIRLESS SPRAYER

OPTIONAL | PORTABLE - CART



OPTIONAL
PORTABLE-CART

17



STEP.1 PULL OUT THE PIN



STEP.2 QUICK LOCK THE FRAME

**QUICK
TRANSFER**
ANY TIME
ANY WHERE

Suitable Models

S SERIES | S1 S2 S3 S3 s
FINE FINISH SERIES | HS495 HS695 HS795

18

OPTIONAL | POWER DEFENDER



110V 120V 220V/230V

PROTECT
YOU AND
YOUR DEVICE

G10



OPTIONAL
POWER DEFENDER G10



DUAL-LED & BUZZER ALARMS

| L NO.: | Status | Range | Flash&Beep Frequency | Power Disconnected |
|----------------|------------|--------------|----------------------|--------------------|
| G10(220V&230V) | Red Blink | High voltage | 1 Hz | in 10 min |
| | Blue Blink | Low voltage | 2 Hz | in 3 min |
| | Blue Blink | Low voltage | 3 Hz | in 1 min |

time/s, 2 Hz=2 times/s, 3 Hz=3 times/s; indicates the frequency of LED flashing

VERSATILE APPLICATION

| | | Suitable Models | | |
|--------------------|--|-----------------|-------|---------|
| S SERIES | | S1 | S2 | S3 S3 s |
| FINE FINISH SERIES | | HS495 | HS695 | HS795 |



ELECTRIC AIRLESS | HS 1095 HS 1195 HD HS 1395 HD HS 1595 HD

AIRLESS SPRAYER

HEAVY DUTY

AIRLESS SPRAYER

MASTER PAINTING



With a powerful brushless DC motor, HiSprayer® Heavy Duty Series Electric Airless Sprayer provides dependable performance for the professional remodeling and repainting contractor who sprays a wide variety of coatings with a variety of tip sizes. It is mainly high-viscosity materials like Putty, Drywall Mud, Plaster, Skim coating, also spray for industrial heavy coatings.



BRUSHLESS DC MOTOR



SUPERIOR FILTER



SMART CONTROL



OPTIMIZED PUMP

ELECTRIC AIRLESS SPRAYER | HS 1095 HS 1195 HD HS 1395 HD HS 1595 HD





ELECTRIC AIRLESS

MASTER PAINTING

HS 1095 HS 1195 HD HS 1395 HD HS 1595 HD



HS 1095



HS 1195 HD



HS 1395 HD



HS 1595 HD

| MODEL TYPE | HS 1095 | | HS 1195HD | | HS 1395HD | | HS 1595HD | |
|------------------|--------------------------------|--|--------------------------------|--|---------------------------|--|---------------------------|--|
| SPRAYER TYPE | PROJECT | | PROJECT | | PROJECT | | PROJECT | |
| POWER TYPE | BRUSHLESS DC MOTOR | | BRUSHLESS DC MOTOR | | BRUSHLESS DC MOTOR | | BRUSHLESS DC MOTOR | |
| DYNAMIC POWER | 2500W 3.4HP 110V/220V, 50-60HZ | | 3000W 4.0HP 110V/220V, 50-60HZ | | 4000W 5.4HP 220V, 50-60HZ | | 4500W 6.0HP 220V, 50-60HZ | |
| FLOW DELIVERY | 4.0 LPM | | 6.0 LPM | | 7.6 LPM | | 9.0 LPM | |
| WORKING PRESSURE | 23 MPA 3336PSI | | 23 MPA 3336PSI | | 23 MPA 3336PSI | | 23 MPA 3336PSI | |
| MAX. NOZZLE SIZE | 0.033" T 0.019" TT | | 0.037" T 0.023" TT | | 0.039" T 0.027" TT | | 0.047" T 0.029" TT | |
| OPTIONAL | HOSE-REEL | | HOSE-REEL | | HOSE-REEL | | HOSE-REEL | |



ELECTRIC AIRLESS MASTER PAINTING

HS 1095 HS 1195 HD HS 1395 HD HS 1595 HD



LONG-LIFE BRUSHLESS DC MOTOR

- Improved control and performance
- maintenance free and longer life span



ADVANTAGE DRIVE

- The longest-lasting drive
- Reliable performance and a lifetime of use are ensured by five-level grinding gears with reinforced steel
- Imported Japanese IKO bearings and German INA bearings ensure smooth and reliable transmission even under high-intensity conditions, resulting in fewer equipment failures. This enhances the reliability and durability of your operations.

Using premium lubricating grease with excellent antioxidation and thermal stability protects critical gear components, preventing premature wear and effectively extending equipment lifespan



OPTIMIZED PUMP ASSEMBLY

- Long life strictly selected American packings and chrome rod
- V Packings are crafted from premium American-imported leather, offering superior durability and performance. Unlike commonly used Chinese packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high pressure

- Achieve quicker cleaning with the intake valve
- Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer.
- The inlet and outlet valves of the pump body are made of tungsten steel hard alloy, ensuring the machine's solidity and durability



AVIATION ALUMINUM MANIFOLD

- Easy maintenance & less clogging
- The inside-but filtering process guarantees a high-quality finish
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency

SMART CONTROL

Equipped with a digital smart pressure control system as standard, allowing for real-time monitoring of equipment operating pressure. It offers swift and precise pressure adjustment response to adapt quickly to changes in spraying conditions.



Continuous upgradability is supported, meeting the personalized customization needs of customers.



AUTOMATIC PROTECTION SYSTEM

In case of abnormal working pressure (typically when the pressure exceeds safe levels), the machine automatically depressurizes to ensure user safety.

SUPPORT DUAL-GUN SPRAYING

Greater versatility.

The overall performance is reliable, supporting simultaneous dual-gun spraying, and suitable for a wider range of working conditions, and enhancing construction efficiency.



OPTIONAL | HOSE-REEL ASSEMBLY



OPTIONAL
HOSE - REEL ASSEMBLY



QUICK SETUP



EASY OPERATION

Suitable Models
MASTER PAINTING SERIES | HS1095 HS1195HD HS1395HD HS1595HD



TWO-COMPONENTS

HS 6495
STAND

HS 2495
HS 2495 - II
PORTABLE



1:1 PRECISION MIXING SPRAYING

The HiSprayer® Two-Component Airless Sprayer can spray both single-component and A/B two-component materials. Spraying single-component materials will help improve work efficiency. Engineered with a unique structural design and a focus on user experience, our airless paint sprayers offer versatile solutions for painting in challenging working environments, to make your painting job much easier and more efficient.





ELECTRIC AIRLESS TWO-TWO-COMPONENTS

HS 2495 HS 2495-11 HS 6495



MIXED INSIDE THE MIX GUN



MIXED OUTSIDE THE GUN



SPRAY SEPARATEDLY



THREE WAYS TO SPRAY THE A&B MATERIALS

TWO-COMPONENTS

| | | |
|------------------|--------------------------------|---------------------------|
| MODEL TYPE | HS 2495 HS 2495-11 | HS 6495 |
| SPRAYER TYPE | PROFESSIONAL | PROFESSIONAL |
| POWER TYPE | BRUSHLESS DC MOTOR | BRUSHLESS DC MOTOR |
| DYNAMIC POWER | 2200W 3.0HP 110V/220V, 50-60HZ | 4000W 5.4HP 220V, 50-60HZ |
| FLOW DELIVERY | 4.0 LPM (TWO-COMPONENTS) | 10.0 LPM (TWO-COMPONENTS) |
| WORKING PRESSURE | 23 MPA 3336PSI | 23 MPA 3336PSI |
| MAX. NOZZLE SIZE | 0.033" T 0.021" TT | 0.039" T 0.031" TT |
| OPTIONAL | --- | HOSE-REEL |

ELECTRIC AIRLESS SPRAYER

TECH-SPECIFICATIONS



ELECTRIC AIRLESS

TWO TWO-COMPONENTS

HS 2495 HS 2495-11 HS 6495



ORIGINAL DESIGN

PARALLEL DUAL-PUMP


- Used for spraying A/B 2-component material
- Default 1:1 spraying ratio, customizable for special needs
- Two-component paint materials can be mixed inside or outside of the spray gun
- Visual pressure gauge monitors the working pressure of A&B pumps in real time to ensure the machine operates smoothly.
- Dual sensor design, monitoring the operation of both pumps in real-time, ensuring user safety




LONG-LIFE BRUSHLES DC MOTOR



ADVANTAGE DRIVE




ROBUST STAINLESS STEEL FRAME



OPTIMIZED PUMP ASSEMBLY



AVIATION ALUMINUM MANIFOLD



LONG LASTING HOSE ACCESSORIES



PUTTY MORTAR SPRAYER

Innovative Tech
Multi-Function



HS 3135



HiSprayer® Mortar Sprayer is ideal for contractors who want to increase productivity in their wall-finishing applications. It can be used to spray Lacquer, binding mortar, anti-cracking mortar, water sand, rock slice paint, putty, stucco, EIFS materials, fireproof and waterproof mortar, etc., spraying height over 10 meters, spray more than 60 square per hour.



HIGH PERFORMANCE PISTON-PUMP



ELECTRIC AIRLESS



HS 3135

SMART-CONTROL SYSTEM

QUICK-CONNECTOR

TOOL-LESS REMOVABLE HOPPER



FLEXIBLE FRAME

HIGH-CAPACITY HOPPER

EASY TRANSFER



MORTAR LAYER

PLASTER LAYER

FINISH

HS 3135 Mortar Sprayer provides easier handling of mortar layer, plaster layer and finish coating.



| | |
|------------------|---------------------------|
| MODEL TYPE | HS 3135 |
| SPRAYER TYPE | PUTTY MORTAR |
| POWER TYPE | BRUSHLESS DC MOTOR |
| DYNAMIC POWER | 3500W 4.7HP 220V, 50-60HZ |
| FLOW DELIVERY | 25.0 LPM |
| WORKING PRESSURE | 6 MPA 870PSI |
| MAX. HOSE LENGTH | 10 M |
| CAPACITY | 51 L |

ELECTRIC AIRLESS SPRAYER

|

TECH-SPECIFICATIONS

ELECTRIC AIRLESS



HS 3135



EZ-OPERATION

SMART MORTAR SPRAYING



ADJUSTABLE SPEED



ONE-CLICK FLUSHING



CRYSTAL DISPLAY


SMART CONTROL SYSTEM

- Equipped with an advanced microprocessor, ensuring prompt spray response.
- Come with over-pressure protection, automatically shutting down the machine in case of excessive pressure.
- One-touch cleaning for convenient operation.



QUICK-CHANGE PUMP DESIGN

- Less downtime with quick-change pump design. Easy to maintain.
- Faster and easier on-the-job repair.
- Designed to pump stucco and EIFS materials.
- The chrome-plated chrome rod enhances wear resistance.

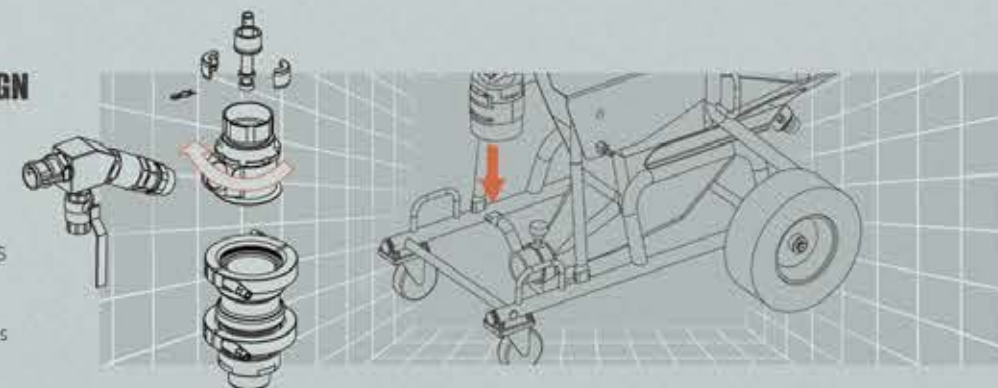

DESIGN FEATURES

FLEXIBLE STRUCTURAL

- Meet the demands of any construction scenarios.
- The modular design allows for easy disassembly, lifting, and transportation.
- Lightweight and portable for easier transportation.

DURABLE CART DESIGN


- Stainless steel cart design withstands rugged environments.
- 360° swivel wheels with brakes for flexible and easy transportation.
- With flat-proof tires, you'll never have flat tires again. Tires can't be punctured by nails, screws, or any sharp debris.
- Ideal for long-distance or multi-scene construction needs.

EASY TO CLEAN HOPPER

- The hopper features a semi-hidden design for effortless disassembly, replacement, and cleaning.
- Lightweight & Durable. It was constructed from high-density polyethylene material.
- Featuring a generous capacity of up to 51L (11 gallons), ensuring efficient completion of tasks.

CHOOSE YOUR RIGHT ELECTRIC AIRLESS SPRAYER

| Model Type | S1 | S2 | S3 | HS 495 | HS 695 | HS 795 | HS 2495 | HS 2495-II | HS 1095 | HS 1195HD | HS 1395HD | HS 1595HD | HS 6495 | HS 3135 | |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------|
| Max. Flow Rate | 1.9L/min | 2.1L/min | 2.3L/min | 2.3L/min | 2.7L/min | 3.1L/min | 4.0L/min | 4.0L/min | 4.0L/min | 6.0L/min | 7.6L/min | 9.0L/min | 10.0L/min | 25.0L/min | |
| Max. Working Pressure | 20Mpa / 2900psi | 20Mpa / 2900psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 23Mpa / 3336psi | 6Mpa / 870psi | |
| Max. Nozzle Size | 0.021" | 0.021" | 0.023" | 0.021" | 0.025" | 0.029" | --- | --- | 1 gun with 0.033"/ 2 guns with 0.019" | 1 gun with 0.037"/ 2 guns with 0.023" | 1 gun with 0.039"/ 2 guns with 0.027" | 1 gun in 0.047"/ 2 guns in 0.029" | 1 guns with 0.039"/ 2 guns with 0.031" | --- | |
| Power Source | Brush Motor | Brush Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | Brushless DC Motor | |
| Power Type | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 110/220V,50~60HZ | 220V,50~60HZ | 220V,50~60HZ | 220V,50~60HZ | 220V,50~60HZ | |
| Dynamic Power | 750W / 1HP | 900W / 1.2HP | 1300W / 1.7HP | 1300W / 1.7HP | 1500W / 2.0HP | 2200W / 3.0HP | 2200W / 3.0HP | 2200W / 3.0HP | 2500W / 3.4HP | 3000W / 4.0HP | 4000W / 5.4HP | 4500W / 6.0HP | 4000W / 5.4HP | 3500W / 4.7HP | |
| Motor Speed | 4200 | 4200 | 5500 | 4800 | 4800 | 4600 | 4800 | 4800 | 5300 | 4900 | 5100 | 4800 | 5300 | 5100 | |
| Gross Weight | 22kgs | 22kgs | 22kgs | 22kgs | 23kgs | 24kgs | 28kgs | 28kgs | 67kgs | 69kgs | 72kgs | 75kgs | 72kgs | 90kgs | |
| Package Size | 42x 50x 54cm | 42x 50x 54cm | 42x 50x 54cm | 42x 50x 54cm | 42x 50x 54cm | 42x 50x 54cm | 56x 40x 61cm | 56x 40x 61cm | 70x 56x 87cm | 70x 56x 87cm | 70x 56x 87cm | 70x 56x 87cm | 70x56x87cm | 103x73x105cm | |
| Package Include | Hose | 1/4" x 15m | 1/4" x 15m | 1/4" x 15m | 1/4" x 15m | 1/4" x 15m | --- | --- | 3/8" x15m & 1/4" x 1.2m | 3/8" x15m & 1/4" x 1.2m | 3/8" x15m & 1/4" x 1.2m | 3/8" x15m & 1/4" x 1.2m | 3/8" x15m & 1/4" x 1.2m | 10m | |
| | Pole | 7/8" x 50cm | 7/8" x 50cm | 7/8" x 50cm | 7/8" x 50cm | 7/8" x 50cm | 7/8" x 50cm | 7/8" x 50cm | 7/8" x 75cm | 7/8" x 75cm | 7/8" x 75cm | 7/8" x 75cm | 7/8" x 75cm | --- | |
| | Gun | GUN x 1 | GUN x 1 | GUN x 1 | GUN x 1 | GUN x 1 | GUN x 1 | GUN x 2 | GUN x 2 | GUN x 1 | GUN x 1 | GUN x 1 | GUN x 1 | AS8000 / GUN x 2 | GUN x 1 |
| | Tip | 517 x 1 | 517 x 1 | 519 x 1 | 519 x 1 | 521 x 1 | 525 x 1 | 525 x 2 | 525 x 2 | 529 x 1 | 531 x 1 | 533 x 1 | 639x 1 | 531 x 2 | --- |
| | Tool | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit | Tool kit |
| Material Applications | Low viscosity materials like latex. Ideal for interior & exterior of residential areas spraying | Low viscosity materials like latex. Ideal for interior & exterior of residential areas spraying | Low viscosity materials like latex. Ideal for interior & exterior of residential areas spraying | Low viscosity materials like latex. Ideal for interior & exterior of residential areas spraying | Low-Medium viscosity materials like latex & acrylic paint, enamels. Ideal for interior & exterior of residential areas spraying | Low-Medium viscosity materials like latex & acrylic paint, enamels. Ideal for interior & exterior of residential areas spraying | Low-Medium viscosity materials like latex & acrylic paint, enamels. Ideal for interior & exterior of residential areas spraying | Low-Medium viscosity materials like latex & acrylic paint, enamels. Ideal for interior & exterior of residential areas spraying | Low-Medium viscosity materials like latex & acrylic paint, enamels. Ideal for interior & exterior of residential areas spraying | Medium-high viscosity paint like primer, acrylics, latex, porcelain glaze, putty, elastomeric coating | Medium-high viscosity paint like primer, acrylics, latex, porcelain glaze, putty, elastomeric coating | Medium-high viscosity paint like primer, acrylics, latex, porcelain glaze, putty, elastomeric coating | Medium-high viscosity paint like primer, acrylics, latex, porcelain glaze, putty, elastomeric coating | Medium-high viscosity paint like primer, acrylics, latex, porcelain glaze, putty, stucco, EIFS, elastomeric coating | |

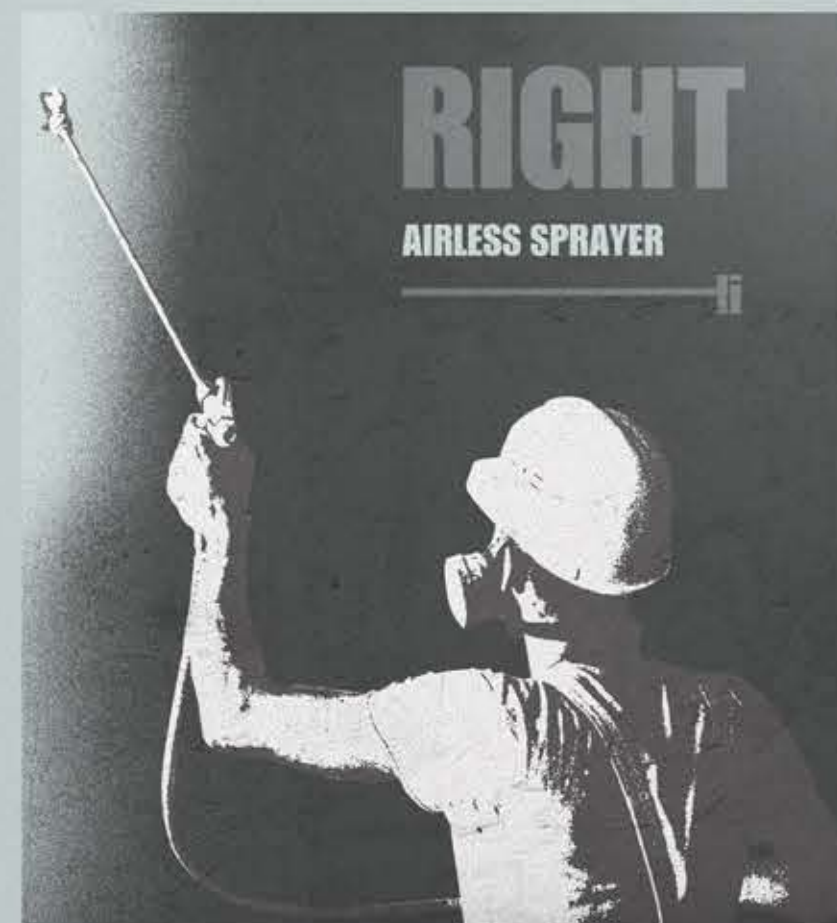



POWER

DESIGNED FOR HEAVY DUTY



GS 8300 TX

GASOLINE AIRLESS

8.3 Ltr./Min. **6.5** HP. **23** Mpa. **0.047"** T **0.033"** TT

HiSprayer® Gasoline Engine Airless Sprayer is suitable for the absence of electricity conditions, medium and large residential, commercial, and industrial buildings paint, indoor and outdoor general paint, latex paint, heavy anti-corrosion engineering, fire protection engineering, waterproof engineering, industrial epoxy floor paint, basic protection ,etc.



HONDA
POWERFUL
ENGINE



SMART
SYSTEM



QUICK-CHANGE
PUMP



SUPERIOR
FILTER

GASOLINE AIRLESS



GASOLINE AIRLESS



AIRLESS SPRAYER

GS 2700 GS 6300 (TX) GS 8300 (TX)




GS 2700



GS 6300TX (GS 6300)



GS 8300TX (GS 8300)

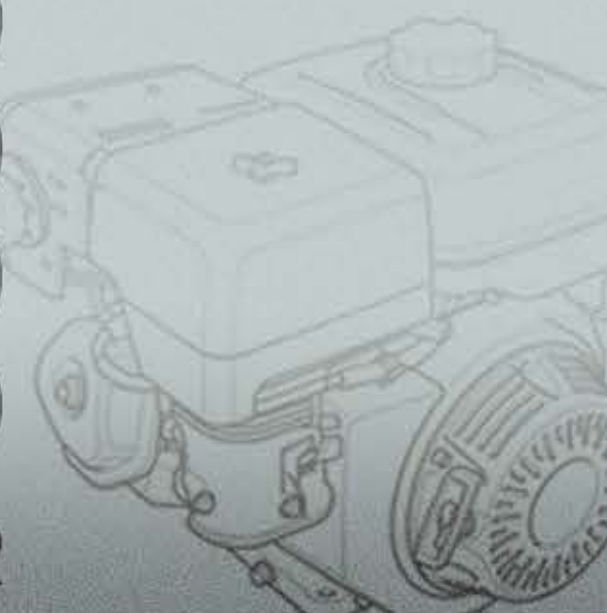

| | | | |
|------------------|----------------|---------------------|---------------------|
| MODEL TYPE | GS 2700 | GS 6300 / GS 6300TX | GS 8300 / GS 8300TX |
| SPRAYER TYPE | HEAVY DUTY | HEAVY DUTY | HEAVY DUTY |
| POWER TYPE | GX160 ENGINE | GX160 ENGINE | GX200 ENGINE |
| DYNAMIC POWER | 3600W 4.8HP | 3600W 4.8HP | 4900W 6.5HP |
| FLOW DELIVERY | 2.7 LPM | 5.0 LPM | 8.3 LPM |
| WORKING PRESSURE | 23 MPA 3336PSI | 23 MPA 3336PSI | 23 MPA 3336PSI |
| MAX. NOZZLE SIZE | 0.025" T | 0.033" T 0.027" TT | 0.047" T 0.033" TT |
| OPTIONAL | HOSE REEL | HOSE REEL | HOSE REEL |



GASOLINE AIRLESS



AIRLESS SPRAYER

GS 2700 GS 6300 (TX) GS 8300 (TX)



SIGNIFICANT ADVANTAGES

HONDA GX ENGINE

- Reliable, powerful & easy-to-start
- Contractor preferred

SMART CONTROL

- Equipped with a digital smart pressure control system as standard, allowing for real-time monitoring of equipment operating pressure. It offers swift and precise pressure adjustment response to adapt quickly to changes in spraying conditions.

- Continuous upgradability is supported, meeting the personalized customization needs of customers.

AVIATION ALUMINUM MANIFOLD


- Easy maintenance & less clogging
- The inside-out filtering process guarantees a high-quality finish
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands



QUICK-CHANGE PUMP DESIGN

- Less downtime with quick-change pump design. Easy to maintain
- Faster and easier on-the-job repair

— GP8300 (TX) ONLY

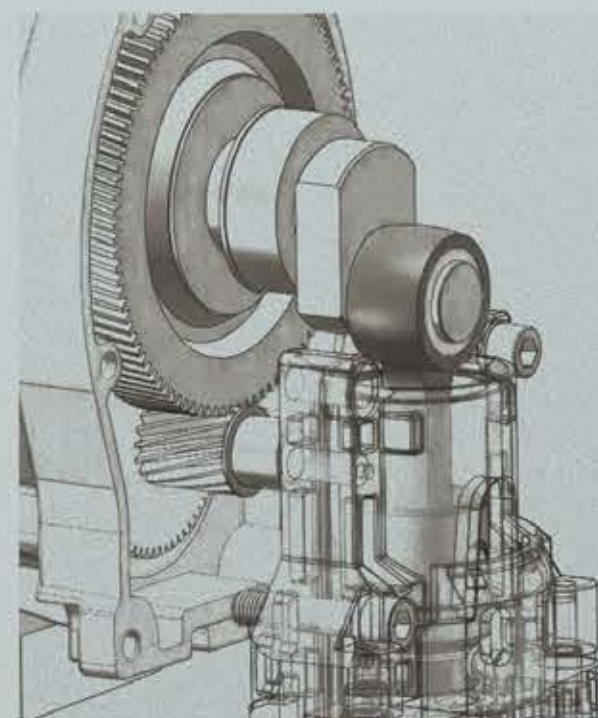

DIFFERENTIATED PARTS

ADVANTAGE DRIVE

- The longest-lasting drive
- Reliable performance and a lifetime of use are ensured by five-level grinding gears with reinforced steel
- Imported Japanese IKO bearings, German INA bearings ensure smooth and reliable transmission even under high-intensity conditions, resulting in fewer equipment failures. This enhances the reliability and durability of your operations
- Using premium lubricating grease with excellent antioxidation and thermal stability protects critical gear components, preventing premature wear and effectively extending equipment lifespan

OPTIMIZED PUMP ASSEMBLY

- Long life strictly selected American packings and a chrome rod
- V Packings crafted from premium American-imported leather offers superior durability and performance. Unlike commonly used Chinese packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high pressure

- Achieve quicker cleaning with the intake valve
- Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer
- The inlet and outlet valves of the pump body are made of tungsten steel hard alloy, ensuring the machine's solidity and durability

- The watchdog pump protection system automatically safeguards the pump against damage in case of insufficient material supply





IDEAL COATING MACHINE FOR CONSTRUCTION



GASOLINE ENGINE POWERED



ELECTRIC MOTOR POWERED

HYDRAULIC

HiSprayer® Hydraulic Sprayer is recommended for very large-scale residential, commercial, corrosion control, and industrial projects, suitable for medium and large residential, commercial and industrial building painting, indoor and outdoor general painting, latex painting, heavy anti-corrosion engineering, fire protection engineering, waterproof engineering, industrial epoxy floor paint, basic protection, etc.



HONDA
GX 270
POWER TYPE. -1



MOTOR
POWER TYPE. -2



SUPERIOR
FILTER



DURABLE
PUMP

HIGH QUALITY
HYDRAULIC MOTOR




HYDRAULIC AIRLESS



AIRLESS SPRAYER

HS 960 HS 970 HS 5303 HS 5311



HS 970

HS 960

HS 5303

HS 5311



| | | | | | | |
|------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| MODEL TYPE | HS 960 / HS 5303 | HS 960A / HS 5303A | HS 960B / HS 5303B | HS 970 / HS 5311 | HS 970A / HS 5311A | HS 970B / HS 5311B |
| SPRAYER TYPE | CONSTRUCTIONAL | CONSTRUCTIONAL | CONSTRUCTIONAL | CONSTRUCTIONAL | CONSTRUCTIONAL | CONSTRUCTIONAL |
| POWER TYPE | ELECTRIC MOTOR | ELECTRIC MOTOR | ELECTRIC MOTOR | GX270 ENGINE | GX270 ENGINE | GX270 ENGINE |
| DYNAMIC POWER | 4000W 220V 50-60HZ | 4000W 220V 50-60HZ | 4000W 220V 50-60HZ | 6700W 9.0HP | 6700W 9.0HP | 6700W 9.0HP |
| FLOW DELIVERY | 10.3 LPM | 6.5 LPM | 3.7 LPM | 11.6 LPM | 7.5 LPM | 4.2 LPM |
| WORKING PRESSURE | 23 MPA 3336PSI | 35 MPA 5076PSI | 50 MPA 7252PSI | 23 MPA 3336PSI | 35 MPA 5076PSI | 50 MPA 7252PSI |
| MAX. NOZZLE SIZE | 0.043" T 0.027" TT | 0.035" T 0.027" TT | 0.031" T 0.023" TT | 0.043" T 0.027" TT | 0.037" T 0.029" TT | 0.031" T 0.023" TT |
| HOSE LENGTH | 15 M | 15 M | 15 M | 15 M | 15 M | 15 M |



HYDRAULIC AIRLESS



AIRLESS SPRAYER

HS 960 HS 970 HS 5303 HS 5311



HIGH-EFFICIENCY HYDRAULIC MOTOR

- Consistent performance ensures continuous operation, keeping you productive at all times.
- Unyielding, withstands high pressure, durable and robust.
- Quick and responsive operation, easy maintenance and extended lifespan.

HYDRAULIC POWER



DURABLE PUMP ASSEMBLY

Long life strictly selected American packings and a chrome rod.

V Packings crafted from premium American-imported leather offers superior durability and performance. Unlike commonly used domestic packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high-pressure.

Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer.



PUMP ROTATION DEVICE

Allows for a 90° rotation, facilitating equipment transportation and maintenance.



HIGH POWERED & EFFICIENT

HYDRAULIC AIRLESS

SUPPORT MULTI-GUN SPRAYING

Greater versatility. The overall performance is reliable, supporting up to 4 guns spraying, suitable for a wider range of working conditions, and enhancing construction efficiency.



HYDRAULIC AIRLESS SPRAYER
HEAVY DUTY PROJECT



PNEUMATIC COATING MACHINE



HiSprayer® Pneumatic Airless Sprayers are specially designed for both small and large workshops where large volumes of paint products need to be applied. The high-quality piston pump ensures a better finish. Large-high pressure fluid filters are standard on this model to reduce rubbish which can cause tip blockages and wear in the paint.

PRESSURE RATIO

30:1

45:1


63:1





PNEUMATIC AIRLESS INDUSTRIAL AIRLESS SPRAYER

HS 310 (30:1) HS 330 (45:1) (63:1)

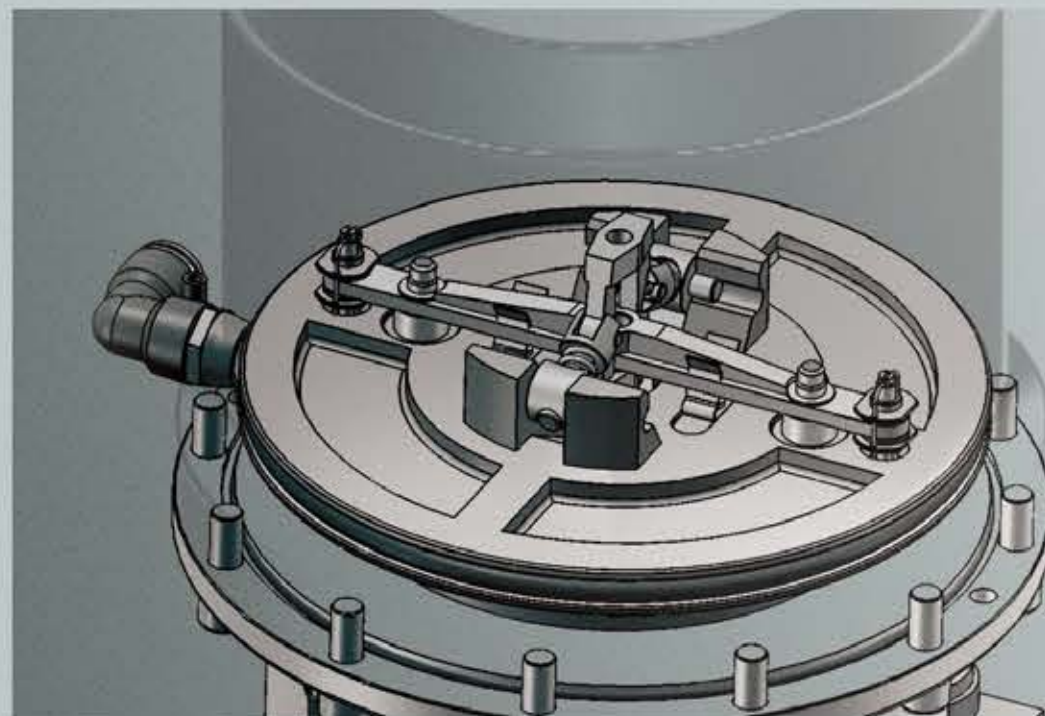

AIR MOTOR
HIGH - PERFORMANCE




| | | | |
|---------------------------|-------------------|-------------------|-------------------|
| MODEL TYPE | HS 310-30 | HS 330-45 | HS 330-63 |
| SPRAYER TYPE | INDUSTRIAL | INDUSTRIAL | INDUSTRIAL |
| FLOW PRESURE RATIO | 30:1 | 45:1 | 63:1 |
| FLOW DELIVERY | 6.0 LPM | 9.7 LPM | 6.0 LPM |
| AIR POWER RANGE | 3-7 BAR | 3-7 BAR | 3-7 BAR |
| STROKE LENGTH | 108 MM | 108 MM | 108 MM |
| MAX. NOZZLE SIZE | 0.031" T | 0.039" T | 0.031" T |
| STANDARD TIP | 525 | 535 | 525 |

PNEUMATIC AIRLESS SPRAYER | TECH-SPECIFICATIONS



PNEUMATIC AIRLESS INDUSTRIAL AIRLESS SPRAYER

HS 310 (30:1) HS 330 (45:1) (63:1)

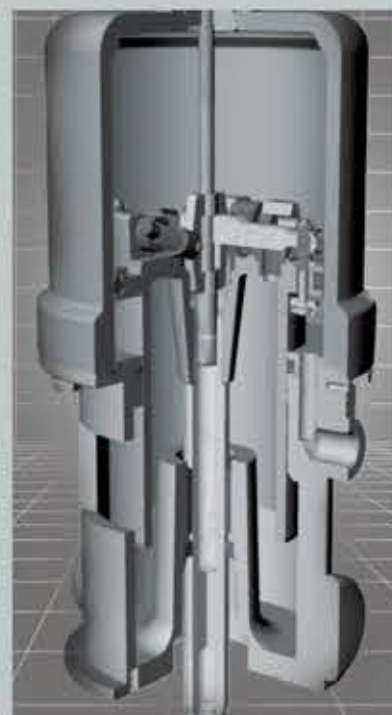

MECHANICAL REVERSING SYSTEM

- Continuous and stable operation.
- The new mechanical reversing pneumatic motor enables swift direction changes.
- Low air consumption. Capable of working in frigid environments without icing.
- High efficiency, easy maintenance, and capable of continuous and stable operation for industrial painting.




PUMP PNEUMATIC

DURABLE PUMP ASSEMBLY

- Long life strictly selected American packings, a chrome rod, and stainless steel.
- V Packings crafted from premium American-imported leather offers superior durability and performance. Unlike commonly used Chinese packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high pressure.
- Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer.
- Less wear, and extends the replacement frequency to once a year.

HIGH-QUALITY ALLOY STEEL

- All key pressure-bearing components are made of high-quality alloy steel, and the high-pressure valves are made of hard alloy, ensuring superior performance and durability of the equipment.

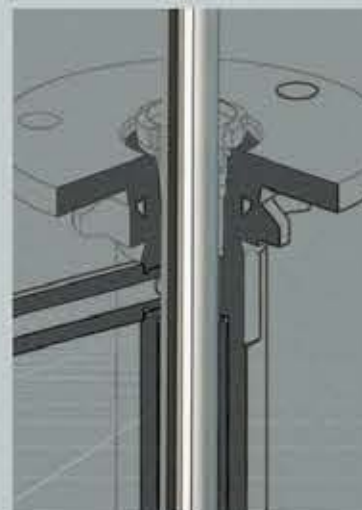

LARGER AIR REGULATOR

- Provides control, filtration, and lubrication of air, enhancing operational reliability and extending the equipment's lifespan.
- Improved air regulator to ensure more stable working pressure.

BETTER SPRAYING EXPERIENCE

LESS CLOGGED

SMALL PRESSURE FLUCTUATIONS

UNIFORM COATING LAYERS

DURABLE CART

- Designed with a detachable structure for easy maneuverability.
- Ideal for long-distance or multi-scene construction needs.

FLEXIBLE MODULAR DESIGN

- The pneumatic motor and the pump are designed with a split structure, making the equipment easier to clean, maintain, and replace components.
- Reduce the downtime. Easy to Repair.
- The smaller packaging size for easier transportation.





SPECIALIZED FOR HEAVY DUTY PNEUMATIC AIRLESS SPRAYERS

The durability, reliability, and ease of operation that you need are built into each unit. Twice the life with half the maintenance. HiSprayer Pneumatic Airless Sprayers have been used in industries, providing their owners with dependable, efficient operation.



370

45:1 / 50:1 / 63:1 / 68:1



ULTIMATE

**SOLUTION FOR
HEAVY-DUTY & COMPLEX
PROJECTS** ■■■■



**370
PRO**



The durability, reliability, and ease of operation that you need are built into each unit. Twice the life with half the maintenance. HiSprayer Pneumatic Airless Sprayers have been used in industries, providing their owners with dependable, efficient operation.



45:1

63:1

68:1



PNEUMATIC AIRLESS

HS 370 (45:1) (50:1) (63:1) (68:1)

HS 370 PRO (45:1) (63:1) (68:1)

AIRLESS SPRAYER

PNEUMATIC AIRLESS



AIRLESS SPRAYER

HS 370 (45:1) (50:1) (63:1) (68:1)

HS 370 PRO (45:1) (63:1) (68:1)



65

| | | | | |
|----------------------|---------------------|---------------------------|---------------------|---------------------|
| MODEL TYPE | HS 370 / HS 370 PRO | HS 370 X2 | HS 370 / HS 370 PRO | HS 370 / HS 370 PRO |
| SPRAYER TYPE | INDUSTRIAL | TWO-COMPONENTS INDUSTRIAL | INDUSTRIAL | INDUSTRIAL |
| FLOW PRESURE RATIO | 45:1 | 50:1 | 63:1 | 68:1 |
| FLOW DELIVERY | 24.0 LPM | 24.0 LPM | 18.0 LPM | 12.0 LPM |
| AIR POWER RANGE | 3~7 BAR | 3~7 BAR | 3~7 BAR | 3~7 BAR |
| MAX. OUTLET PRESSURE | 320 BAR | 350 BAR | 440 BAR | 480 BAR |
| MAX. NOZZLE SIZE | 0.033" T | 0.035" T | 0.033" T | 0.033" T |
| STANDARD TIP | 533 | 535 | 533 | 533 |

PNEUMATIC AIRLESS SPRAYER

TECH-SPECIFICATIONS

66



PNEUMATIC AIRLESS



AIRLESS SPRAYER

HS 370 (45:1) (50:1) (63:1) (68:1) HS 370 PRO (45:1) (63:1) (68:1)



MECHANICAL REVERSING SYSTEM

- Continuous and stable operation.
- The new mechanical reversing pneumatic motor enables swift direction changes.
- Low air consumption. Capable of working in frigid environments without icing.
- High efficiency, easy maintenance, and capable of continuous and stable operation for industrial painting.

SUPERIOR PERFORMANCE

PUMP

370

DURABLE PUMP ASSEMBLY



Long life strictly selected American packings, a chrome rod, and stainless steel.


V Packings crafted from premium American-imported leather offers superior durability and performance. Unlike commonly used Chinese packings, these packings boast higher abrasion resistance, better sealing capabilities, and stronger resistance to high pressure.

Designed to withstand continuous high-intensity operation, ensuring long-lasting reliability for your sprayer.

Less wear, and extends the replacement frequency to once a year.

HIGH-QUALITY ALLOY STEEL

All key pressure-bearing components are made of high-quality alloy steel, and the high-pressure valves are made of hard alloy, ensuring superior performance and durability of the equipment.

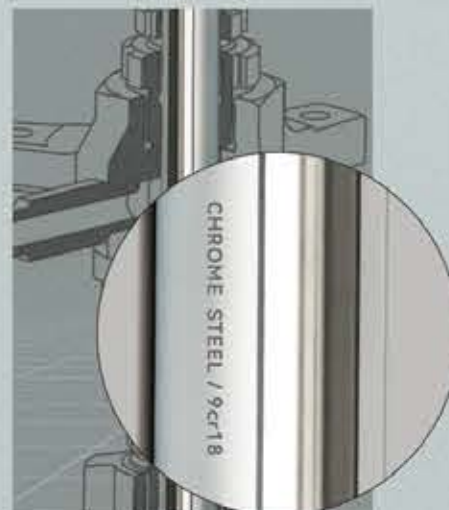

LARGER AIR REGULATOR

- Provides control, filtration, and lubrication of air, enhancing operational reliability and extending the equipment's lifespan.
- Improved air regulator to ensure more stable working pressure.

BETTER SPRAYING EXPERIENCE

FLAT PROOF TIRES

- With flat proof tires, you'll never have flat tires again. Tires can't be punctured by nails, screws, or any sharp debris.
- Ideal for long-distance or multi-scene construction needs.

DURABLE CART

- Designed with a detachable structure for easy maneuverability.
- Ideal for long-distance or multi-scene construction needs.

FLEXIBLE MODULAR DESIGN

- The pneumatic motor and the pump are designed with a split structure, making the equipment easier to clean, maintain, and replace components.
- Reduce the downtime. Easy to Repair.
- The smaller packaging size for easier transportation.



CHOOSE YOUR RIGHT PNEUMATIC AIRLESS SPRAYER

| Model Type | HS 310-30 | HS 330-45 | HS 330-63 | HB 370-45 | HB 370-50 x2 | HB 370-63 | HB 370-68 | HB 370Pro451 | HB 370Pro631 | HB 370Pro681 |
|---------------------------|---|---|---|---|---|---|---|---|---|---|
| Max. Fluid Delivery | 6L/min | 9.7L/min | 6L/min | 24L/min | 24L/min | 18L/min | 12L/min | 24L/min | 18L/min | 12L/min |
| Max. Discharge Pressure | 211Bar | 315Bar | 441Bar | 320Bar | 350Bar | 440Bar | 480Bar | 320Bar | 440Bar | 480Bar |
| Pressure Ratio | 30 : 1 | 45 : 1 | 63 : 1 | 45 : 1 | 50 : 1 | 63 : 1 | 68 : 1 | 45 : 1 | 63 : 1 | 68 : 1 |
| CC per Cycle | 108 | 108 | 108 | 250 | 115 | 193 | 180 | 250 | 193 | 180 |
| Max. Pump Speed/min | 90 | 94 | 90 | 88 | 89 | 93 | 89 | 88 | 93 | 89 |
| Stroke Length | 120mm | 120mm | 120mm | 120mm | 120mm | 120mm | 120mm | 120mm | 120mm | 120mm |
| Operating Air Pressure | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar | 3~7 Bar |
| (Paint Spray) Hose Length | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m | 1/4"x15 m |
| Max. Nozzle Size | 0.031" | 0.039" | 0.031" | 0.033" | 0.035" | 0.033" | 0.033" | 0.033" | 0.033" | 0.033" |
| Standard Nozzle Size | 525 | 535 | 525 | 533 | 535 | 533 | 521 | 533 | 533 | 521 |
| Box Size(L*W*H/mm) | 1050x 440x 720 | 1050x 440x 720 | 1050x 440x 720 | 1330x 710x 930 | 1330x 710x 930 | 1330x 710x 930 | 1330x 710x 930 | 1330x 710x 930 | 1330x 710x 930 | 1330x 710x 930 |
| Gross Weight | 58kgs | 71kgs | 77kgs | 137kgs | 170kgs | 141kgs | 151kgs | 137kgs | 141kgs | 151kgs |
| Material Applications | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint | medium-high paint like epoxy zinc-rich paint, chlorinated rubber, acrylic, nitro, amino acid, phenolic, polyurethane, putty (certain models), fireproof paint |



INDUSTRIAL FIELD COATING



RIGHT
AIRLESS SPRAYER





AIRLESS SPRAYER FAMILY

MEET ALL YOUR NEEDS OF AIRLESS PAINTING



| | | | | | | | | | | | | | | |
|----|--------|------------|---------|-----------|---------|---------|---------|-----------|-----------|---------|-----------|-----------|--------------|--------------|
| S1 | HS 495 | HS 2495 | HS 1095 | HS 1195HD | HS 6495 | HS 6495 | GS 2700 | GS 6300 | GS 8300 | HS 970 | HS 310-30 | HS 330-45 | HS 370-45 | HS 370PR0451 |
| S2 | HS 695 | HS 2495-II | | HS 1395HD | | | | GS 6300TX | GS 8300TX | HS 960 | | HS 330-63 | HS 370-50 X2 | HS 370PR0631 |
| S3 | HS 795 | | | HS 1595HD | | | | | | HS 5311 | | | HS 370-63 | HS 370PR0681 |
| | | | | | | | | | | HS 5303 | | | HS 370-68 | |

PAINT MASTER





MODEL : HS 6495



FOAM

6495

SPRAY
FOAM



TECHNICAL SPECIFICATION

| | |
|--------------------------|---|
| Drive mode | Electric |
| Max. ratio | 1 : 1 |
| Total output | — |
| Flow capacity | 4 - 12 L/min |
| Max. operating pressure | 230 Bar |
| Max. air inlet pressure | 5 - 8 Bar |
| Air supply requirement | Approx. 600 L/min |
| Heated hose max power | 2000 W |
| Max. hose package length | 60 Meter |
| Material heaters | 10 KW |
| Max. temperature | 90 °C |
| Max. power input | 14 KW |
| Supply voltage | option 1: 220 V /50 HZ option 2: 380V |
| Weight & Package size | 195 KG 109 * 79 * 118 cm |
| Applicable materials | Polyurethane & Polyurea |

HiSprayer® Spray Foam Machine is designed specifically for polyurethane foam and polyurea spraying, with its convenience, intelligent control, powerful performance, and high-efficiency pump system, will be the ideal choice for your next project. Whether it's building insulation, industrial protection, or high-end coating, the EP7285 F will help ensure the success of your project



PRECISION
1:1 MIXING



PROTABILITY
STRUCTURE



INTELLIGENT
CONTROL



DURABLE
TWIN-PUMP

SPRAY FOAM MACHINE



SPRAY FOAM

HS 6495 F



BROUGHT BY TECHNOLOGICAL INNOVATION



Portability & Mobility



Intelligent Digital Control



High-Efficiency Pump System



Brushless DC Motor



Modular Design




Multi-Voltage Scenario Adaptation

Building Insulation & Thermal Projects | Industrial Waterproofing & Corrosion-Resistant | Industrial Flooring and Pipeline | Exterior Walls and Roof Elastic



RELATED

High Flow Fluid Heater

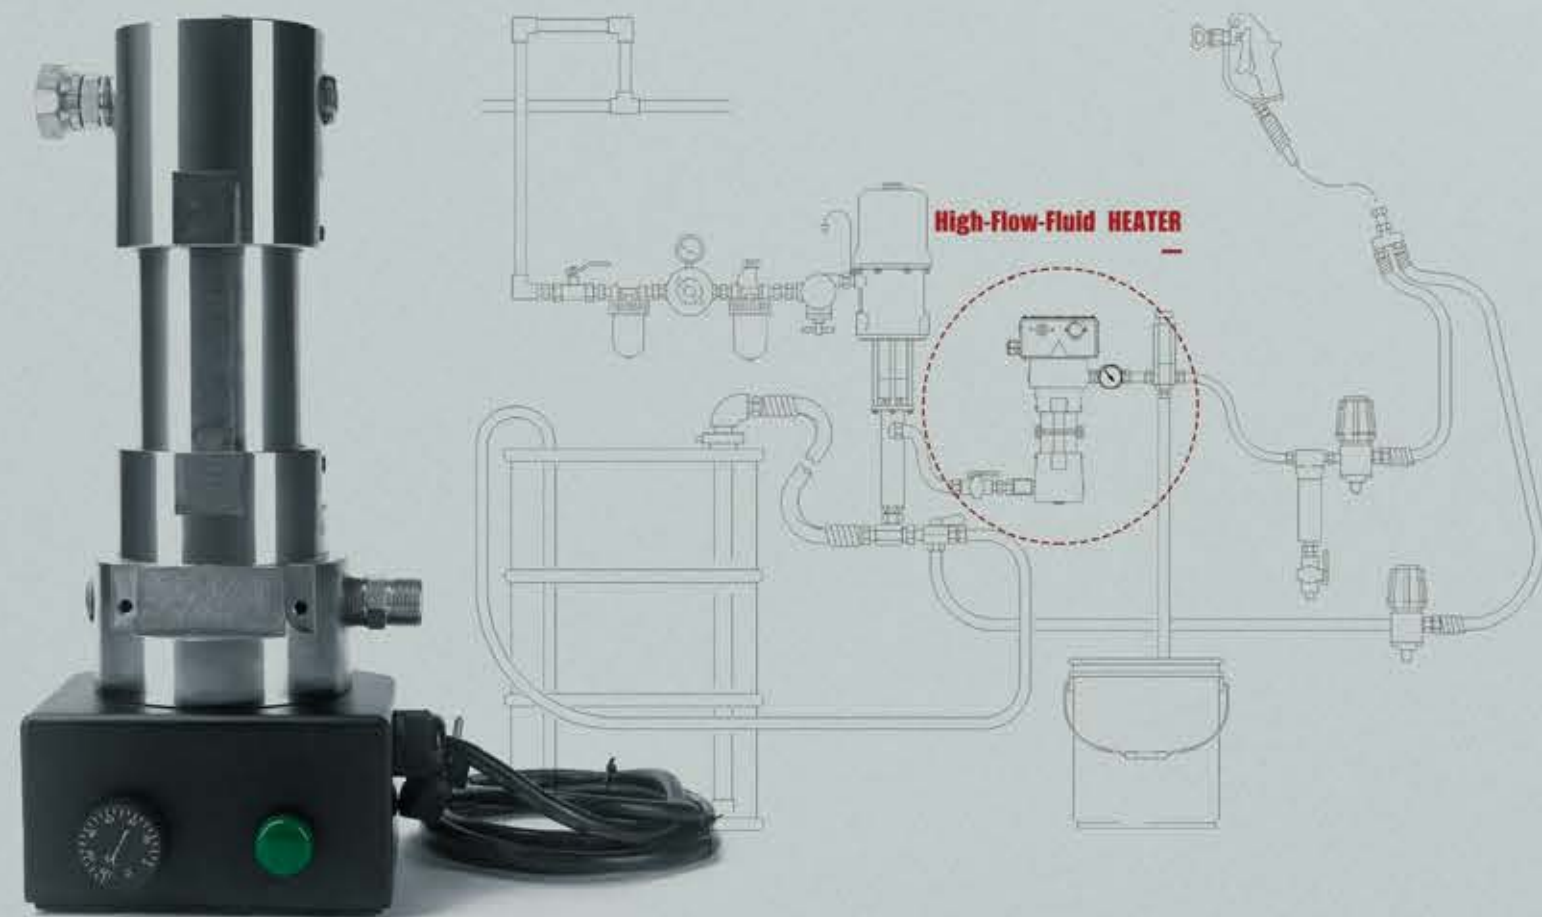


- CONVENIENT DISASSEMBLY |
- GLOBAL ADAPTABILITY |
- SIMPLIFIED MAINTENANCE |
- EFFICIENT HEATING |
- PRECISE TEMPERATURE CONTROL |

FOAM

6495

SPRAY
FOAM



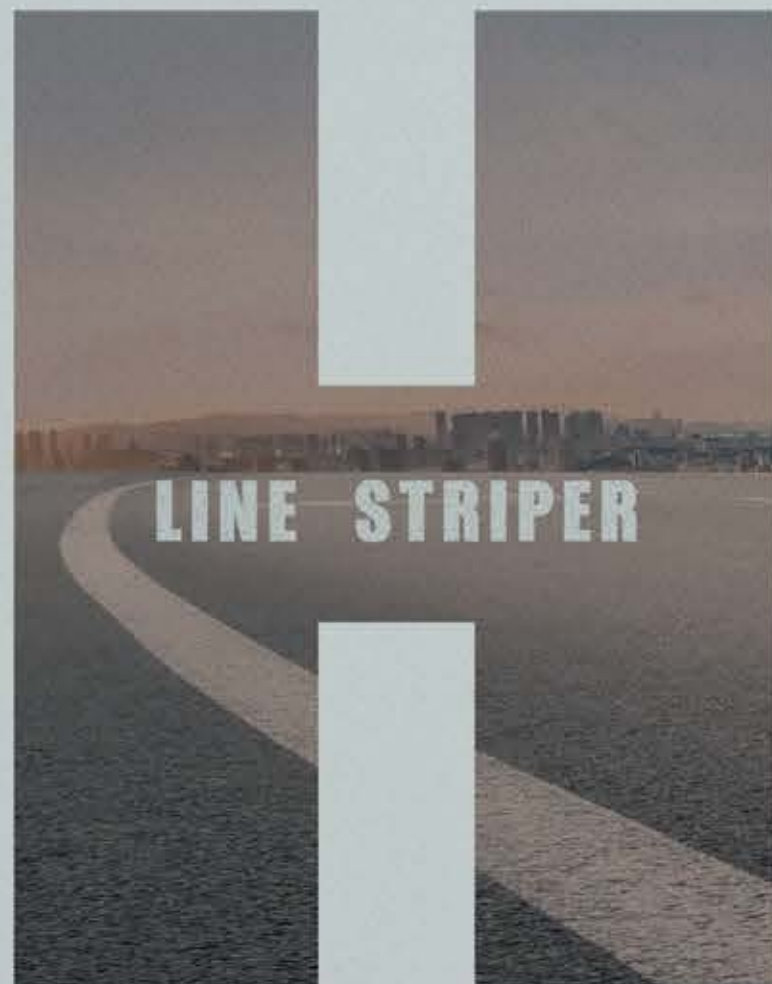


CONTENTS :

| | |
|---------------|-----------------------|
| P 83 - P 92 | STANDARD SERIES |
| P 93 - P 104 | TWO-COMPONENTS SERIES |
| P 105 - P 110 | OPTIONAL |
| P 111 - P 112 | SPECIFICATIONS |

MODELS :

| | | |
|----------------|----------|--------|
| HS 27 / HS 27E | HS 27-11 | HSP 99 |
| HS 50 | HS 50-11 | HSP 91 |
| HS 58 | | |

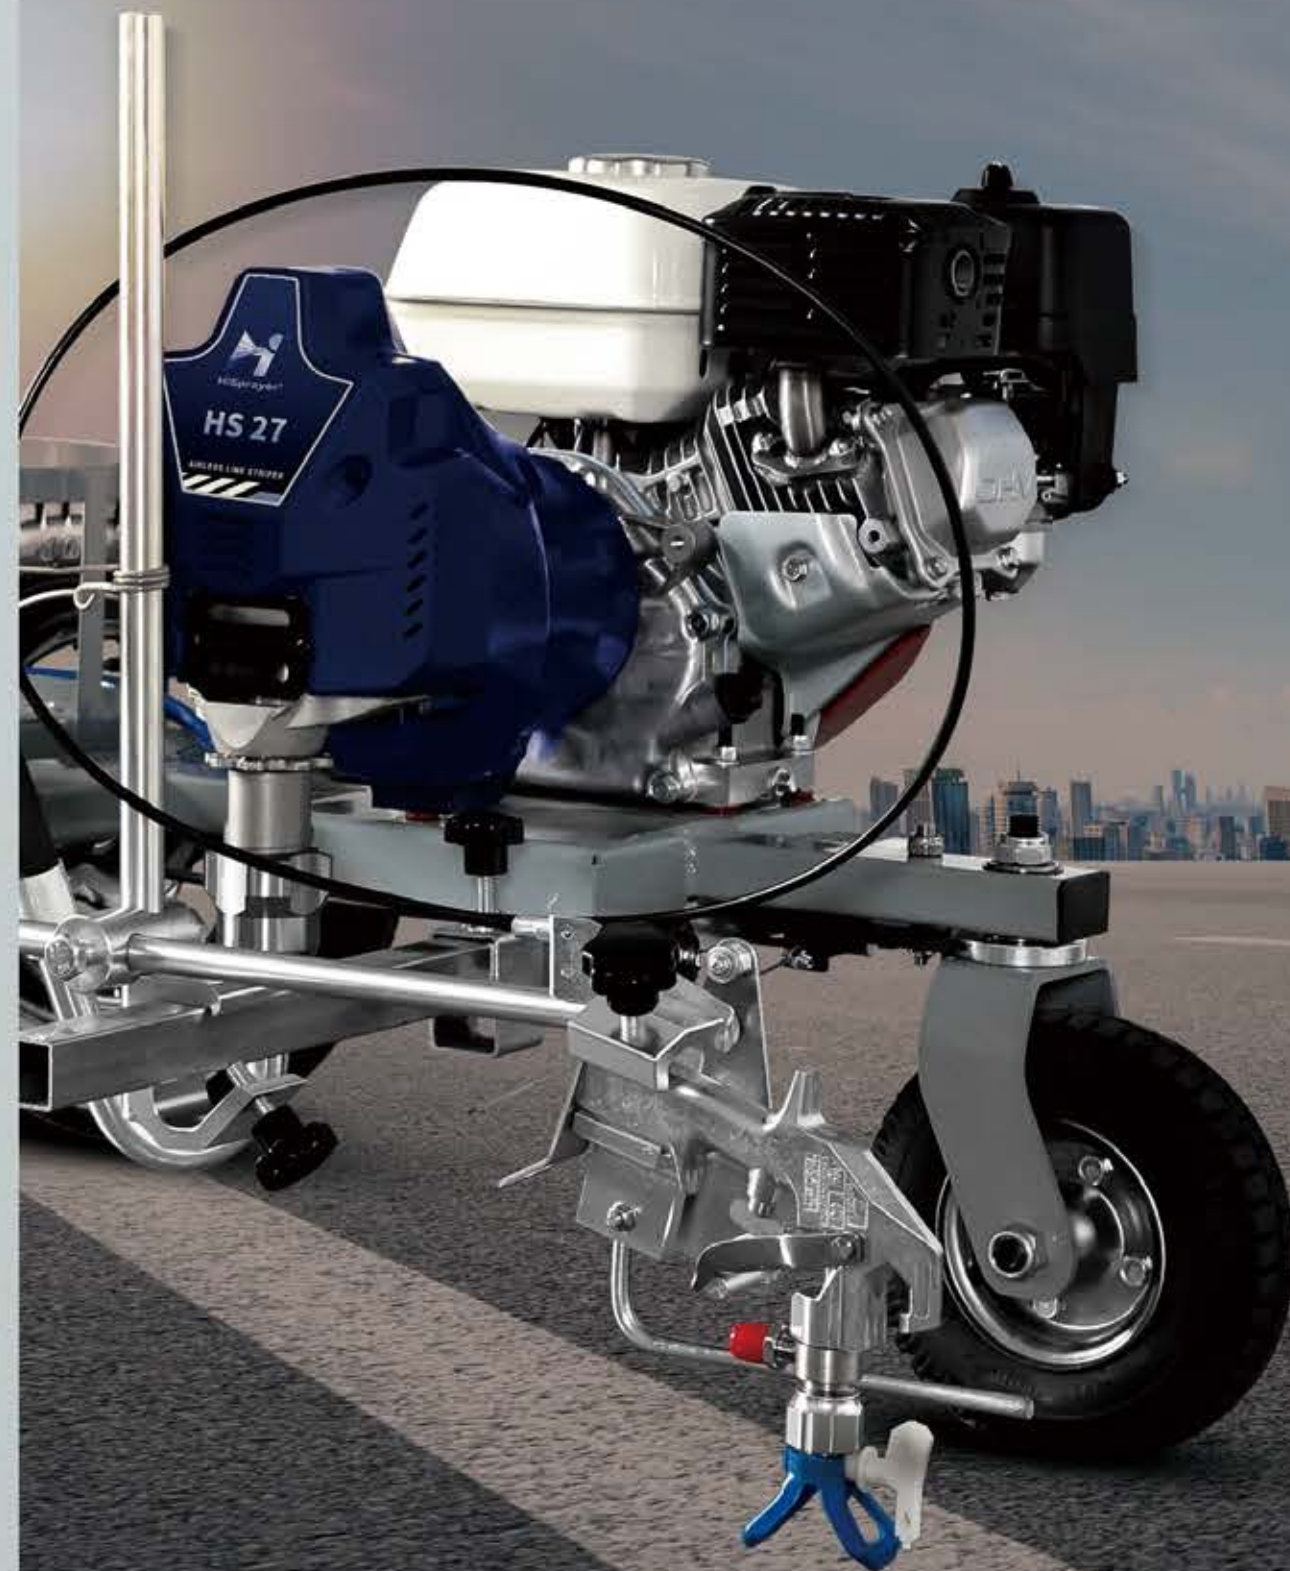

MORE EFFICIENT LINE STRIPER

HIGH PRECISION = EASY OPERATION = STABLE POWER



STANDARD SERIES
HS 27
LINE STRIPER

2.7 Ltr./Min. **4.8** HP. **23** Mpa. **0.027" T**

www.hi-sprayer.com



HiSprayer® - Standard Series - Road Marking Machine is a professional choice for athletic floor and pavement work. Hand-push cold paint road marking machine ensures stable pressure, is simple to use, convenient for maintenance. The use of high-pressure airless spraying technology provides simple control, good damping effects, and linear change to minimize fluctuations caused by pavement.



HONDA
POWERFUL
ENGINE



SUPERIOR
FILTER



SMART
SYSTEM



DURABLE
PUMP

STANDARD SERIES LINE STRIPER

| HS 27



E-LINE E-LINE E-LINE E-LINE E-LINE E-LINE E-LINE E-LINE E-LINE E-LINE

BATTERY POWERED

LINE STRIPER



2.5 Ltr./Min. 3.0 HP. 23 Mpa. 0.027" T

www.hi-sprayer.com



HiSprayer® - Standard Series - Road Marking Machine is a professional choice for athletic floor and pavement work. Hand-push cold paint road marking machine ensures stable pressure, is simple to use, convenient for maintenance. The use of high-pressure airless spraying technology provides simple control, good damping effects, and linear change to minimize fluctuations caused by pavement.



RELIABLE
BATTERY PACK



SUPERIOR
FILTER



MAINTENANCE-FREE
BRUSHLESS DC MOTOR



DURABLE
PUMP

STANDARD SERIES LINE STRIPER

HS 27E



STANDARD SERIES | HS 27 HS 27E HS 50 HS 58 HSP 99

LINE STRIPER

HSP 99

STANDARD SERIES



HYDRAULIC

POWERFUL ENGINE | QUALITY MOTOR | GREAT PERFORMANCE



LINE STRIPER



9.9 Ltr./Min. 9.0 HP. 23 Mpa. 0.053" T 0.038" TT



HONDA POWERFUL ENGINE



EFFICIENT HYDRAULIC MOTOR



DURABLE PUMP

STRIPING POWER SYSTEM

STANDARD SERIES LINE STRIPER | HSP 99

STANDARD SERIES



LINE STRIPER

HS 27 | HS 27E | HS 50 | HS 58 | HSP 99



HS 27 & HS 27E



HS 50



HS 58



HSP 99

| MODEL TYPE | HS 27 | HS 27E | HS 50 | HS 58 | HSP 99 |
|------------------|----------------------|--------|----------------------|-------|-----------------------|
| SPRAYER TYPE | _ GASOLINE_ | | _ BATTERY_ | | STANDARD _ GASOLINE_ |
| POWER TYPE | STANDARD _ GASOLINE_ | | STANDARD _ GASOLINE_ | | STANDARD _ HYDRAULIC_ |
| DYNAMIC POWER | GX160 ENGINE | | BATTERY PACK | | GX160 ENGINE |
| FLOW DELIVERY | 3600W 4.8HP | | 2200W 3.0HP | | GX200 ENGINE |
| WORKING PRESSURE | 2.7 LPM | | 2.5 LPM | | 5.0 LPM |
| MAX. NOZZLE SIZE | 23 MPA 3336PSI | | 23 MPA 3336PSI | | 23 MPA 3336PSI |
| OPTIONAL | 0.027" T | | 0.035" T 0.025" TT | | 0.035" T 0.025" TT |
| | BEAD DISPENSER | | -- | | BEAD DISPENSER |

STANDARD SERIES LINE STRIPER

TECH-SPECIFICATIONS



STANDARD SERIES



LINE STRIPER

HS 27 | HS 50 | HS 58



FAST START UP YOUR WORK!

HONDA GX ENGINE

- Reliable, powerful & easy-to-start
- Contractor preferred

SMART CONTROL PANEL

- Visual digital display panel for precise spray pressure control
- Maintain a steady spray pressure for perfect line marking

SPRAY GUN & TIPS

- Equipped with specialized line marking spray guns and nozzles
- Ensures rapid response for spraying
- Meets various line width construction requirements

AVIATION ALUMINUM MANIFOLD

- Easy maintenance & less clogging
- The inside-out filtering process guarantees a high-quality finish
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency



MEET YOUR VARIOUS NEEDS!

MULTI-FUNCTIONAL SPRAY GUN HOLDER

- Much more flexible to give you multiple road-marking choices
- The spray gun can be adjusted in multiple directions to meet various application scenarios such as front, rear, up, down, left, and right for road marking



360° SELF-ADJUSTING FRONT WHEEL

- More flexible steering for easier operation
- An easy method for maintaining straight-tracking
- Dual precision bearing design ensures operational stability



STANDARD SERIES



LINE STRIPER

HSP 99



GREAT PERFORMANCE FOR YOUR PROJECT !

HONDA GX 270 ENGINE

- Reliable, powerful & easy-to-start
- Contractor preferred

HYDRAULIC MOTOR

- Consistent performance ensures continuous operation, keeping you productive at all times
- Unyielding, withstands high pressure, durable, and robust
- Quick and responsive operation, easy maintenance, and extended lifespan

SPRAY GUN & TIPS

- Equipped with specialized line marking spray guns and nozzles

- Ensures rapid response for spraying
- Meets various line width construction requirements

AVIATION ALUMINUM MANIFOLD

- Easy maintenance & less clogging
- The inside-out filtering process guarantees a high-quality finish
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency



MEET YOUR VARIOUS NEEDS !

MULTI-FUNCTIONAL SPRAY GUN HOLDER

- Much more flexible to give you multiple road-marking choices
- The spray gun can be adjusted in multiple directions to meet various application scenarios such as front, rear, up, down, left, and right for road marking



360° SELF-ADJUSTING FRONT WHEEL

- More flexible steering for easier operation
- An easy method for maintaining straight-tracking
- Dual precision bearing design ensures operational stability





TWO-COMPONENTS SERIES | HS 27-II HS 50-II HSP 91

LINE STRIPER

TWO COMPONENTS



5.0 Ltr./Min. 4.8 HP. 23 Mpa. 0.033" T 0.023" TT

HS 27-II PLUS

LINE STRIPER

TWO COMPONENTS SERIES



DURABLE
TWIN - PUMP



HiSprayer® - Two Components Series is the preferred choice for professional striping Line Marking contractors who are looking for performance and features in a 2-gun striper. Capable of spraying dual-component or multi-component materials. Deliver valuable features allowing you to complete jobs faster, more efficiently, and with more accuracy.



HONDA
POWERFUL
ENGINE



SUPERIOR
FILTER



TWO-COMPONENTS SERIES | HS 27-II HS 50-II HSP 91



9.1 Ltr./Min.

9.0 HP.

23 Mpa.

0.053" T

0.038" TT

0.032" TTT

0.028" TTTT

HYDRAULIC

LINE STRIPER



TWO SERIES
COMPONENTS
LINE STRIPER

TWO-COMPONENTS SERIES LINE STRIPER | HSP 91



TWO-COMPONENTS SERIES

HS 27-II | HS 50-II | HSP 91



| | | | | |
|-------------------------|--------------------------|--------------------------|--------------------------|--|
| MODEL TYPE | HS 27-II BASIC | HS 27-II PLUS | HS 50-II | HSP 91 |
| SPRAYER TYPE | 2-COMPONENTS _ GASOLINE_ | 2-COMPONENTS _ GASOLINE_ | 2-COMPONENTS _ GASOLINE_ | 2-COMPONENTS _ HYDRAULIC_ |
| POWER TYPE | | | | |
| HONDA | GX160 ENGINE | GX160 ENGINE | GX200 ENGINE | GX270 ENGINE |
| DYNAMIC POWER | 3600W 4.8HP | 3600W 4.8HP | 4900W 6.5HP | 6700W 9.0HP |
| FLOW DELIVERY | 5.0 LPM | 5.0 LPM | 8.8 LPM | 9.1 LPM |
| WORKING PRESSURE | 23 MPA 3336PSI | 23 MPA 3336PSI | 23 MPA 3336PSI | 23 MPA 3336PSI |
| MAX. NOZZLE SIZE | 0.033" T 0.023" TT | 0.033" T 0.023" TT | 0.045" T 0.031" TT | 0.053" T 0.038" TT 0.032" TT 0.028" TT |
| OPTIONAL | BEAD DISPENSER | BEAD DISPENSER | BEAD DISPENSER | BEAD DISPENSER |



TWO-COMPONENTS SERIES LINE STRIPER

TECH-SPECIFICATIONS



TWO-COMPONENTS SERIES

HS 27-II

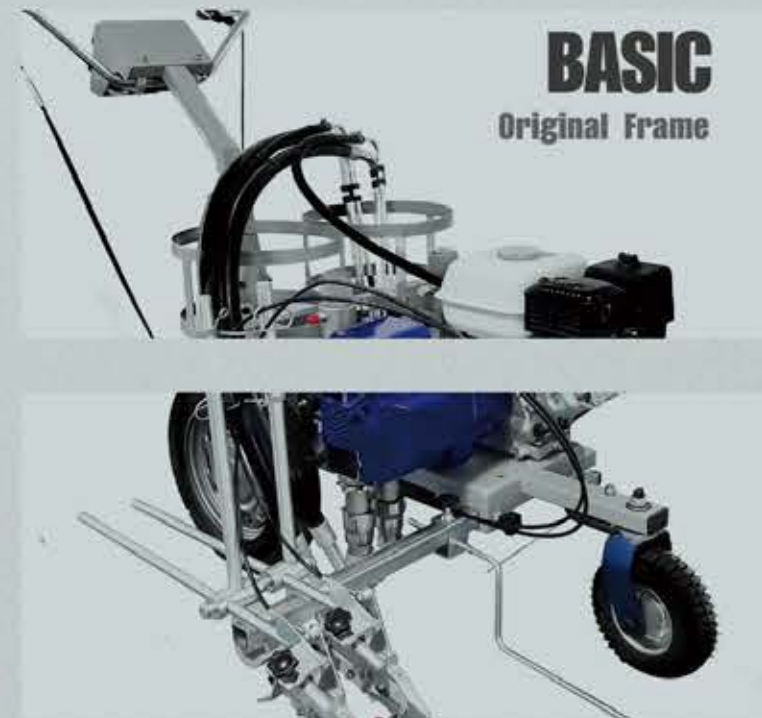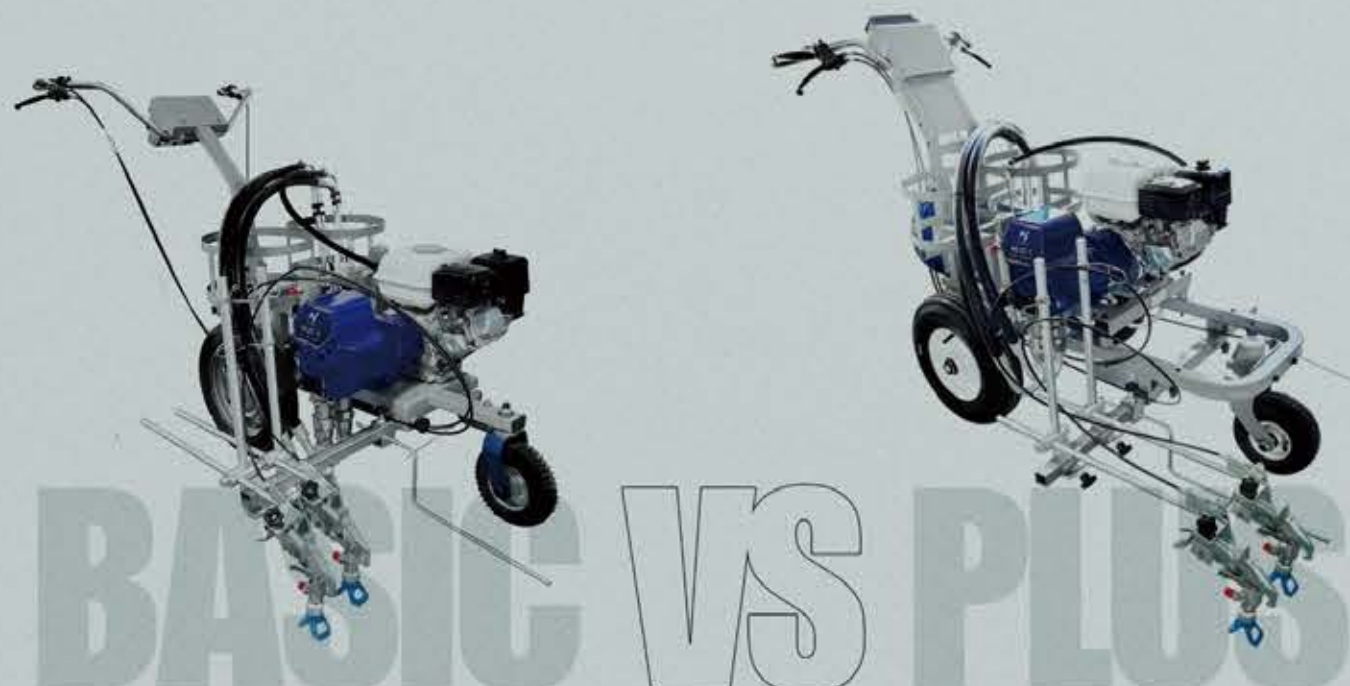

COMMON FEATURES

- HONDA GX ENGINE
- Aviation Aluminum Manifold
- Smart Control Panel
- Precision Piston Pump
- Spray Gun & Tips
- 360° SELF-ADJUSTING FRONT WHEEL
- MULTI-FUNCTIONAL SPRAY GUN HOLDER



TWO-COMPONENTS SERIES

HS 50-II



SUPERIOR

HS 50-II
LINE STRIPING EQUIPMENT!

POWER

HONDA GX 200 ENGINE

- Consistent performance ensures continuous operation, keeping you productive at all times.
- Unyielding, withstands high pressure, durable, and robust.
- Quick and responsive operation, easy maintenance, and extended lifespan.

DUAL

Aviation Aluminum Manifold

- Easy maintenance & less clogging
- The inside-out filtering process guarantees a high-quality finish.
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands.
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency.

DUAL

Pump Assembly


- Used for spraying A/B two-component material
- Default 1:1 spraying ratio, customizable for special needs.
- Visual pressure gauge monitors the working pressure of A&B pumps in real time to ensure the machine operates smoothly.



TWO HS 50-II



TWO-COMPONENTS SERIES

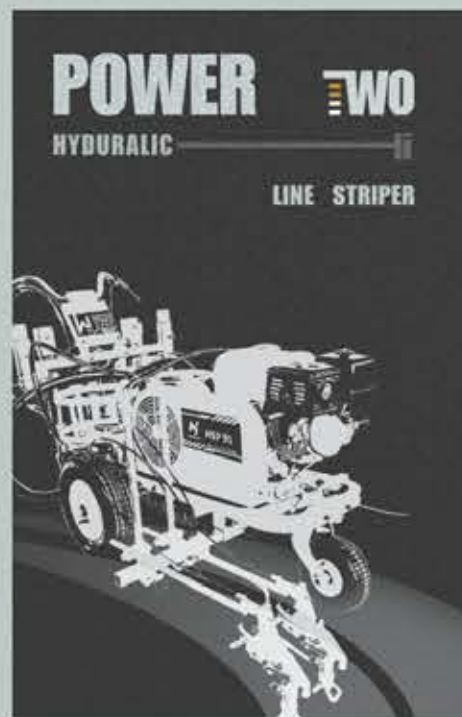

HSP91 VS HSP99



HSP 91

UPGRADED HSP 91 LINE STRIPING EQUIPMENT!

DUAL HYDRAULIC MOTOR

- Consistent performance ensures continuous operation, keeping you productive at all times
- Unyielding, withstands high pressure, durable, and robust
- Quick and responsive operation, easy maintenance, and extended lifespan.

DUAL Aviation Aluminum Manifold

- Easy maintenance & less clogging
- The inside-out filtering process guarantees a high-quality finish
- Utilizing aviation aluminum manifold, with strength 2.4 times greater than that of rival brands
- Possessing outstanding mechanical performance and corrosion resistance, ensures excellent stability even during prolonged and continuous spraying operations, thereby extending machine lifespan and enhancing work efficiency.

DUAL Pump Assembly

- Equipped with a dual-reinforced hydraulic pump, capable of spraying dual-component paint.



OPTIONAL | GENERAL Glass Beads Dispenser Equipment



STYLE - 1



STYLE - 2



General Glass Beads Dispenser

| |
|-----------|
| STYLE - 1 |
| STYLE - 2 |

Suitable Models

| | |
|-----------------|---------------------------|
| HS 27 | HS 27-11 (Basic) |
| HS 27-11 (Plus) | HS 50 HS 58 HSP 99 HSP 91 |

OPTIONAL

APS-II

Two-Components
Glass Beads Dispenser Equipment

AIR PUMP SYSTEM



109



General Glass Beads Dispenser

APS-II

Suitable Models

HSP 99 HSP 91



DISPENSER

AIR PUMP



AIR TANK



HOPPER

110

OPTIONAL | DRIVER Engine Line Driver Equipment

FOR **BETTER** STRIPING EXPERIENCE

Safer | Comfortable | Stable



QUICK LINK



HONDA GX200 ENGINE



SOFT SEAT



WARNING LIGHT




HYDRAULIC MOTOR

Line-Driver | Suitable For All Models

CHOOSE YOUR RIGHT LINE STRIPER

| Model Type | Spray Type | Power Type | Dynamic Power | Flow Delivery | Working Pressure | Pump Qty. | Painting Type. | Optional. |
|------------------|--------------------------------------|------------------------------------|---------------|---------------|------------------|-----------|---|---|
| HS 27 | Standard | Gasoline Engine (Honda GX160) | 3600W/4.8HP | 2.7L/min | 23Mpa | Single | Normal | Dispenser Style-1 / Driver |
| HS 27E | Standard | Battery Set | 2200W/3.0HP | 2.5L/min | 23Mpa | Single | Normal | Dispenser Style-2 / Driver |
| HS 27-II (BASIC) | Two-Components | Gasoline Engine (Honda GX160) | 3600W/4.8HP | 5.0L/min | 23Mpa | Dual | Dual-Strip / Dual-Color / Two-Components Painting | Dispenser Style-1 / Driver |
| HS 27-II (PLUS) | Two-Components | Gasoline Engine (Honda GX160) | 3600W/4.8HP | 5.0L/min | 23Mpa | Dual | Dual-Strip / Dual-Color / Two-Components Painting | Dispenser Style-2 / Driver |
| HS 50 | Standard | Gasoline Engine (Honda GX160) | 3600W/4.8HP | 5.0L/min | 23Mpa | Single | Normal / Dual-Strip Painting | Dispenser Style-2 / Driver |
| HS 50-II | Two-Components | Gasoline Engine (Honda GX200) | 4900W/6.5HP | 8.8L/min | 23Mpa | Dual | Dual-Strip / Dual-Color / Two-Components Painting | Driver |
| HS 58 | Standard | Gasoline Engine (Honda GX200) | 4900W/6.5HP | 5.8L/min | 23Mpa | Single | Normal / Dual-Strip Painting | Dispenser Style-2 / Driver |
| HSP 99 | Standard | Hydraulic & GX270 Engine | 6700W/9.0HP | 9.9L/min | 23Mpa | Single | Normal / Dual-Strip Painting | Dispenser Style-2 / Dispenser APS-II / Driver |
| HSP 99 (APS-II) | Upgraded (With Air-Pump-System) | Hydraulic & GX270 Engine | 6700W/9.0HP | 9.9L/min | 23Mpa | Single | Normal / Dual-Strip Painting | Driver |
| HSP 91 | Two-Components | Hydraulic & GX270 Engine | 6700W/9.0HP | 9.1L/min | 23Mpa | Dual | Dual-Strip / Dual-Color / Two-Components Painting | Dispenser Style-2 / Dispenser APS-II / Driver |
| HSP 91 (APS-II) | Upgraded (With Air-Pump-System) | Hydraulic & GX270 Engine | 6700W/9.0HP | 9.1L/min | 23Mpa | Dual | Dual-Strip / Dual-Color / Two-Components Painting | Driver |

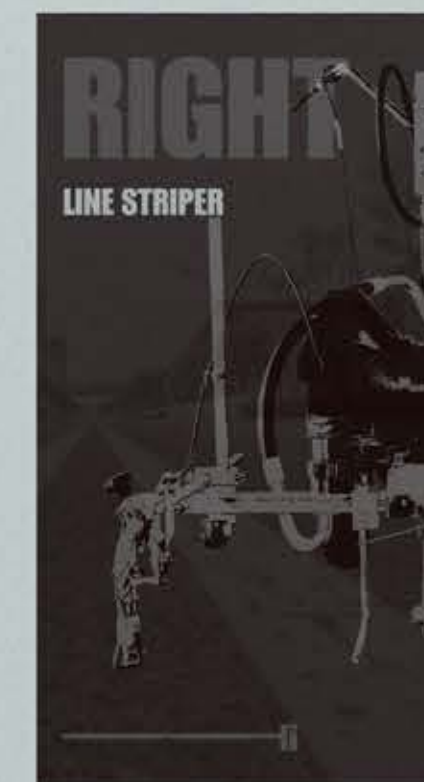



SPRAY GUN



115

SPRAY GUN



MODELS :

HB 131

HB 132

HB 133

HB 134

HB 135

HB 137

AS 8000

MIX GUN

2K INJECTION GUN


116



GUN

SPRAY


HiSprayer® High-Pressure Spray Gun is adapted to different specifications of reversible spray tips, which can be applied to spray different ranges. The design of filters makes the spray gun easy to block, and easier to replace, making it serviceable for a long time. Besides, it is easy to remove and clean, which brings much more convenience to you. Scope of use, such as interior walls, exterior walls, wooden furniture, iron railings, various site floors, etc.

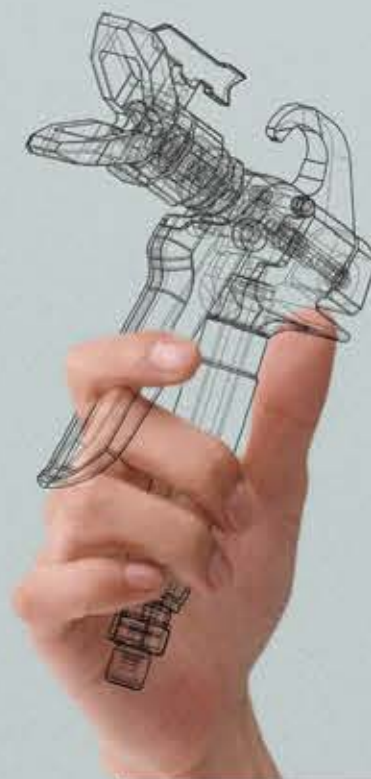


DIY & DECOR



CONTRACTOR

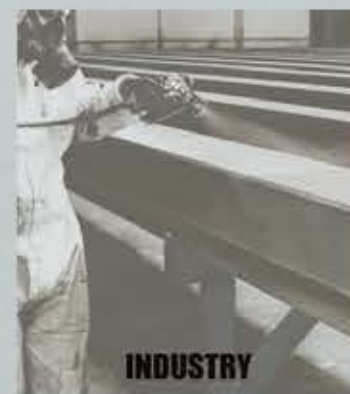

INDUSTRY

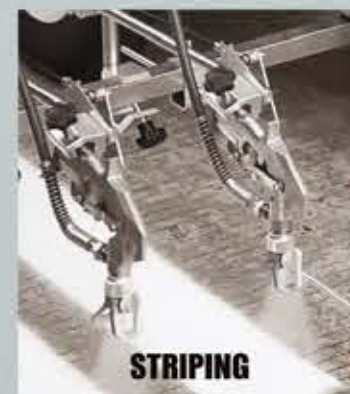

STRIPING



MEET ALL YOUR NEEDS OF PAINTING JOBS



HB 131



HB 132



HB 133



HB 134A



HB 135



HB 137



AS 8000



LOOKING FORWARD TO
MORE SPRAY GUNS



| MODEL TYPE | GUN TYPE | SUITABLE MACHINE MODELS |
|------------|--------------------------------|---|
| HB 131 | PREMIUM ALUMINUM FORGED | S1 S2 S3 S3s HS495 HS695 HS795 HS2495 GS2700 |
| HB 132 | TRADITIONAL | S1 S2 S3 S3s HS495 HS695 HS795 HS2495 GS2700 |
| HB 133 | PRECISION MACHINING (UPGRADED) | S1 S2 S3 S3s HS495 HS695 HS795 HS2495 GS2700 |
| HB 134A | SPECIAL FOR MARKING MACHINE | HS27 HS27E HS27-II HS50 HS50-II HS56 HSP91 HSP99 |
| HB 135 | STRAIGHT HANDLE | S1 S2 S3 S3s HS495 HS695 HS795 HS2495 GS2700 |
| HB 137 | SPECIAL FOR PNEUMATIC MACHINE | HS310-30 HS330-45 HS330-63 HS370-45 HS370-63 HS370-68 HS370PRO451 HS370PRO631 HS370PRO681 |
| AS 8000 | SPECIAL FOR MASS FLOW SPRAYING | HS1095 HS1195HD HS1395HD HS1595HD HS6495 GS6300 GS6300TX GS8300 GS8300TX HS960 HS970 |




USER-FRIENDLY DESIGN

VERSATILE APPLICATION

DURABLE CONSTRUCTION

SAFETY FEATURES

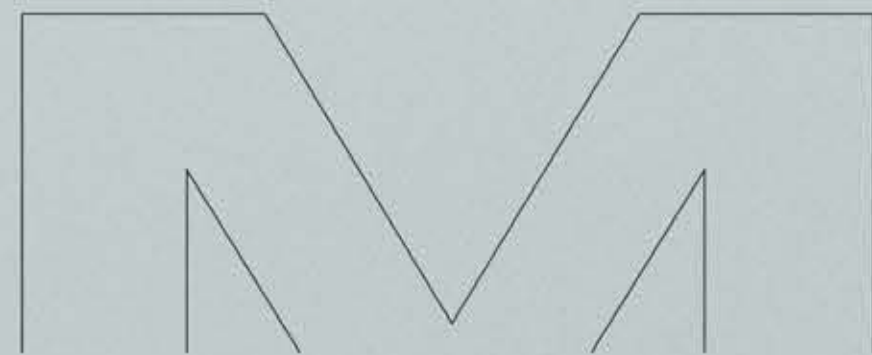


1:1 PRECISION

Used to spray 2 components materials Internal Mixing Technology ensures a perfect blend of components right inside the gun, leading to consistent spray performance and reducing material waste.



2K

INJECTION RESIN GUN

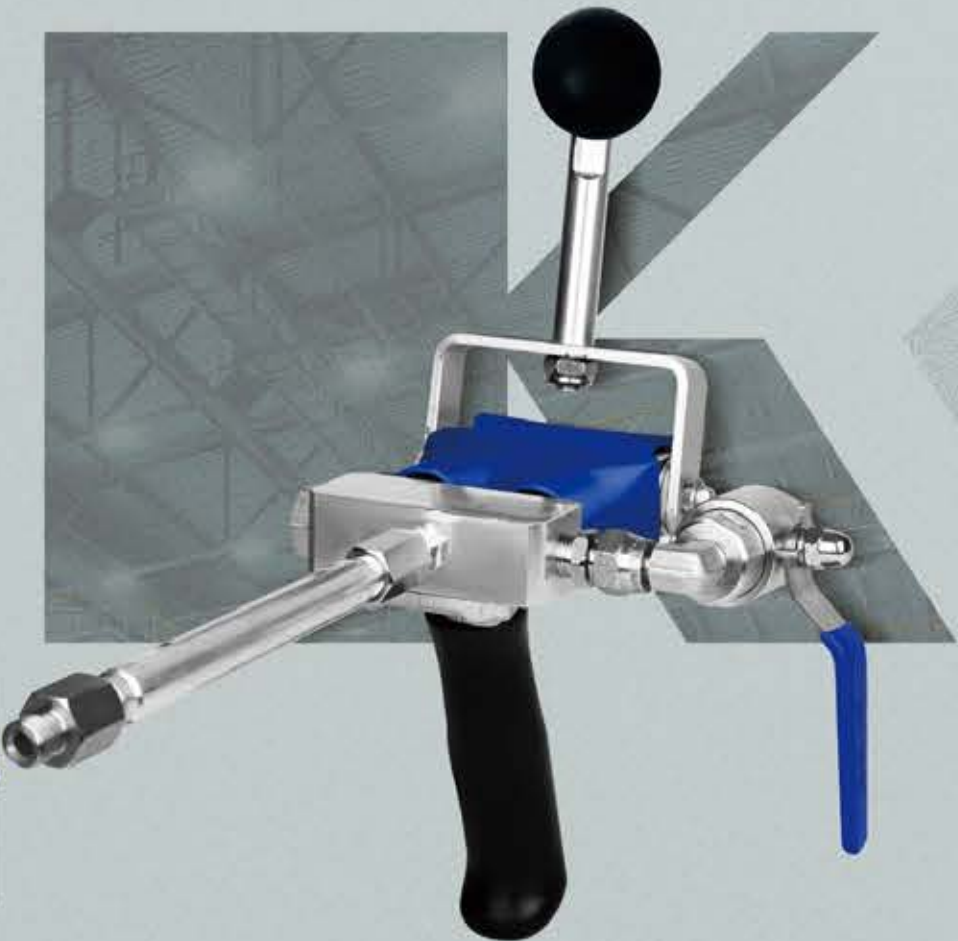

INJECTION

HIGH PRESSURE

RESIN

2K INJECTION RESIN GUN

PRECISION THREAD & DURABLE & ERGONOMIC



ACCESSORIES

125

SPRAY FOAM MACHINE

FULL RANGE OF ACCESSORIES :

- SPRAY TIPS
- GUN ACCESSORIES
- PUMP ASSY
- PISTON ROD
- REPAIR KIT
- FILTER
- HIGH-PRESSURE HOSE
- CONNECTOR

.....

126

TIP

| | | | | |
|--------------|-----------|------------|-----------|-----------|
| Name | HB 151 | HB 152 | HB 153 | HB 154 |
| Color | Black | Yellow | Red | Grey |
| Suitable For | RAC 5 | For Wagner | For Titan | XHD RAC |
| Dimension | All Sizes | All Sizes | All Sizes | All Sizes |



PISTON PUMP



PUMP REPAIR KIT



FILTER SCREEN



PISTON ROD



SWIVEL CONNECTOR




HIGH-PRESSURE HOSE




EXTENSION POLE

+ For other Spare Parts, please contact your specialized HVBAH sales consultant.

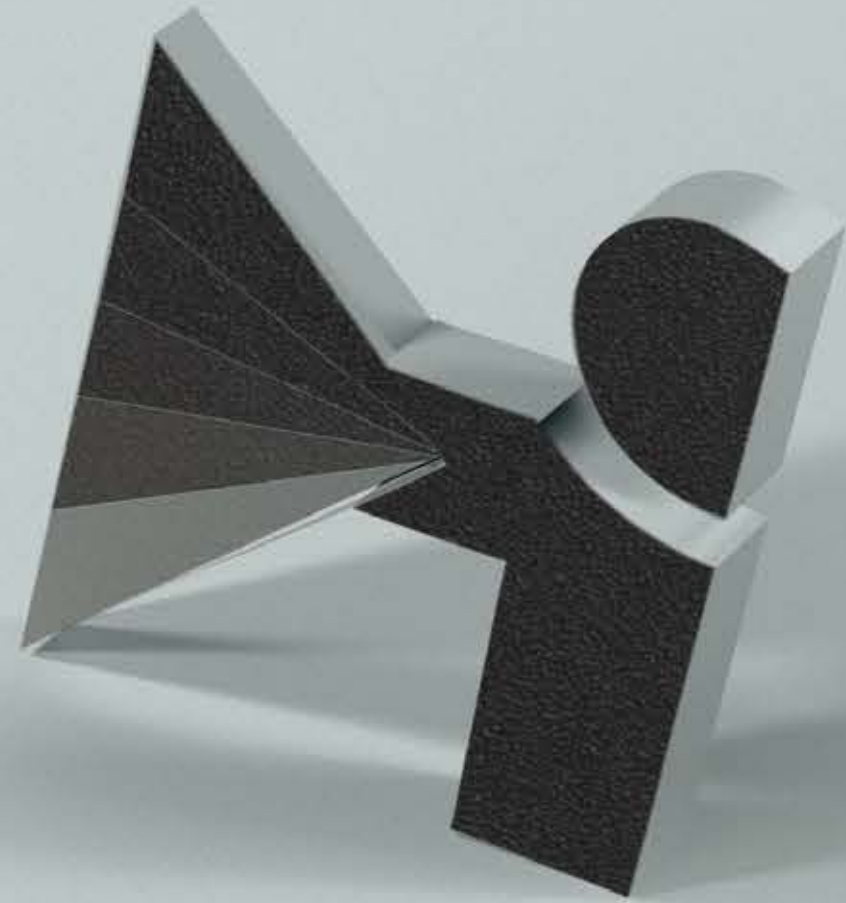

PRO

 **HiSprayer** AIRLESS SPRAYER

Say hi to professional result